



MASTER TL-D 90 Graphica

MASTER TL-D 90 Graphica 36W/965 SLV/10

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Operating and Electrical	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Power Consumption	36.8 W
Flux measurement reference	Sphere	Lamp Current (Nom)	0.440 A
Life to 50% Failures (Nom)	8,000 hour(s)	Controls and Dimming	
Light Technical		Dimmable	Yes
Color Code	965 [CCT of 6500K]	Mechanical and Housing	
Luminous Flux	2,100 lm	Bulb Shape	T8 [26 mm (T8)]
Color Designation	Cool Daylight	Approval and Application	
Chromaticity Coordinate X (Nom)	0.313	Energy Efficiency Class	G
Chromaticity Coordinate Y (Nom)	0.337	Mercury (Hg) Content (Nom)	1.7 mg
Correlated Color Temperature (Nom)	6500 K	Energy Consumption kWh/1000 h	37 kWh
Luminous Efficacy (rated) (Nom)	57.1 lm/W	EPREL Registration Number	423528
Color rendering index (CRI)	97		

MASTER TL-D 90 Graphica

Product Data	
Order product name	MASTER TL-D 90 Graphica 36W/965 SLV/10
Full product name	MASTER TL-D 90 Graphica 36W/965 SLV/10
Full product code	871150088836525
Order code	928044796581
Material Nr. (12NC)	928044796581


Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500888365
Numerator - Packs per outer box	10
EAN/UPC - Case	8711500888662

Dimensional drawing

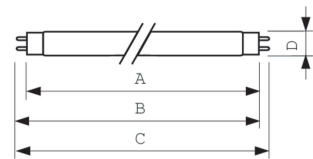


Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D 90 Graphica 36W/965 SLV/10	28 mm	1,199.4 mm	1,206.5 mm	1,204.1 mm	1,213.6 mm

Photometric data

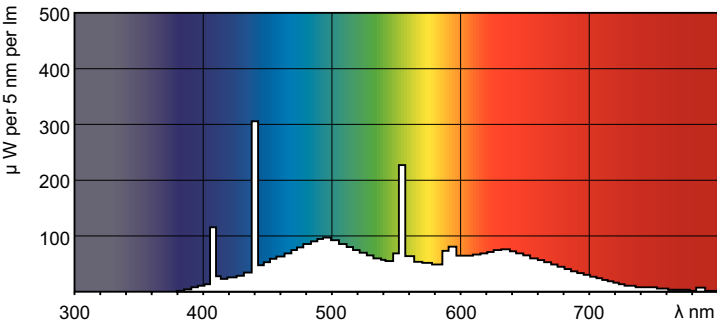


Spectral Power Distribution Colour - MASTER TL-D 90 Graphica 36W/965 SLV/10

Lifetime

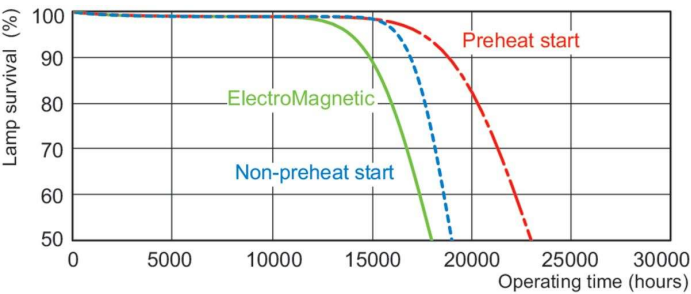


Life Expectancy Diagram - MASTER TL-D 90 Graphica 36W/965 SLV/10

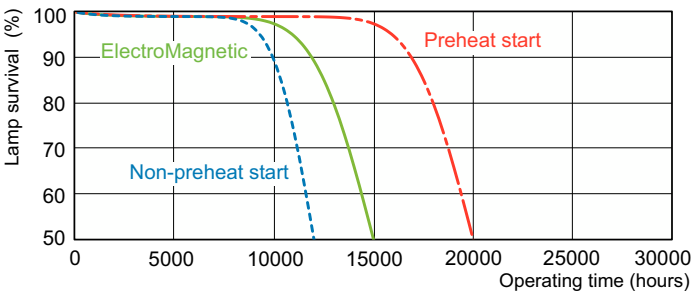

Life Expectancy Diagram - MASTER TL-D 90 Graphica 36W/965 SLV/10

MASTER TL-D 90 Graphica

Lifetime

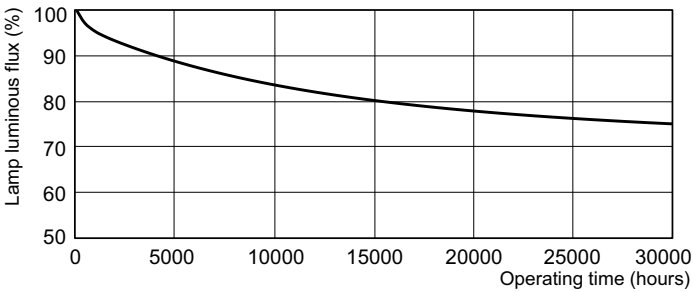

Lumen Maintenance Diagram - MASTER TL-D 90 Graphica 36W/965 SLV/10

