



MASTERColour CDM-TC

MASTERC CDM-TC 35W/830 G8.5 1CT/12

Range of single-ended, very compact, high-efficiency, discharge lamps with a stable colour over lifetime and a crisp, sparkling light

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Use only with electronic control gear. 35W/830 lamps may also use electromagnetic gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Arc Length O (Nom)	5 mm		
Cap-Base	G8.5				
Operating Position	UNIVERSAL [Any or Universal (U)]	Operating and Electrical			
ife to 50% Failures (Nom)	12,000 hour(s)	Power Consumption	39.1 W		
		Voltage (Nom)	88 V		
Light Technical		Voltage (Nom)	88 V		
Color Code	830 [CCT of 3000K]				
Color Designation	Warm White (WW)	Controls and Dimming			
Chromaticity Coordinate X (Nom)	0.432	Dimmable	No		
Chromaticity Coordinate Y (Nom)	0.394				
Correlated Color Temperature (Nom)	3000 K	Mechanical and Housing			
uminous Efficacy (rated) (Nom)	79 lm/W	Bulb Finish	Clear		
Color rendering index (CRI)	81	Bulb Material	UV-Block Quartz		

MASTERColour CDM-TC

Bulb Shape	T14			
Approval and Application				
Mercury (Hg) Content (Nom)	3.1 mg			
Energy Consumption kWh/1000 h	43 kWh			
Product Data				
Order product name	MASTERC CDM-TC 35W/830 G8.5 1CT/12			
Full product name	MASTERC CDM-TC 35W/830 G8.5 1CT/12			


Full product code	871869648459300		
Order code	928085205129		
Material Nr. (12NC)	928085205129		
Numerator - Quantity Per Pack	1		
EAN/UPC - Product/Case	8718696484593		
Numerator - Packs per outer box	12		
EAN/UPC - Case	8718696484609		


Dimensional drawing




Product	D (max)	D	0	L (min)	L (max)	L	C (max)
MASTERC CDM-TC	15 mm	0.5 inch	5 mm	51 mm	53 mm	52 mm	85 mm
35W/830 G8.5 1CT/12							

Photometric data






Light Distribution Diagram - MASTERC CDM-TC 35W/830 G8.5 1CT/12

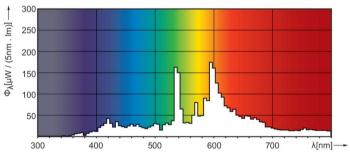

Spectral Power Distribution Colour - MASTERC CDM-TC 35W/830 G8.5 1CT/12

MASTERColour CDM-TC

Lifetime

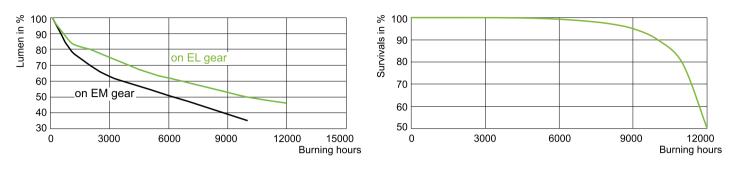

Lumen Maintenance Diagram - MASTERC CDM-TC 35W/830 G8.5 1CT/12

Life Expectancy Diagram - MASTERC CDM-TC 35W/830 G8.5 1CT/12



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, May 15 - data subject to change