



MASTER CosmoWhite CPO-TW

MST CosmoWh CPO-TW 90W/840 PGZ12 1CT

用于室外照明的新一代陶瓷金属卤化物灯使用新型灯座和透明石英外部灯泡生成白光

安全提示

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

产品数据

一般信息	
底盖	PGZ12 [PGZ12]
操作位置	UNIVERSAL [任意或通用 (U)]
50% 故障条件下的使用寿命 (标称)	15,000 小时
灯技术	
颜色代码	840 [CCT of 4000K]
颜色名称	白色 (WH)
色度坐标 X (标称)	382
色度坐标 Y (标称)	396
光效 (额定)(标称)	115 lm/W
显色指数 (CRI)	79
弧长 O (标称)	18 mm


操作和电气	
功耗	88 W
电压 (标称)	96 V
电压 (标称)	96 V
控制和调光	
可调光	是
机械和外壳	
灯泡外观	透明
灯泡外形	T19 [T 19 毫米]
审批和申请	
汞 (Hg) 含量 (标称)	2.5 mg

MASTER CosmoWhite CPO-TW

能耗 kWh/1000 h	99 kWh
产品数据	
订单产品名称	MST CosmoWh CPO-TW 90W/840 PGZ12 1CT
完整的产品名称	MST CosmoWh CPO-TW 90W/840 PGZ12 1CT
完整产品代码	871829113789400
订购代码	928095105127


材料编号 (12NC)	928095105127
计算器 - 每包数量	1
EAN/UPC - 产品/箱	8718291137894
计算器 - 每个外包装箱中的包数	12
EAN/UPC - 案例	8718291137900

二维绘图




Product	D (max)	D	O	L	C (max)
MST CosmoWh CPO-TW 90W/840 PGZ12 1CT	20 mm	19 mm	18 mm	66 mm	143 mm

光度数据

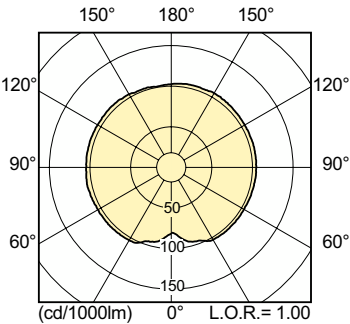


Light Distribution Diagram - MST CosmoWh CPO-TW 90W/840 PGZ12 1CT




Spectral Power Distribution Colour - MST CosmoWh CPO-TW 90W/840 PGZ12 1CT

MASTER CosmoWhite CPO-TW

寿命

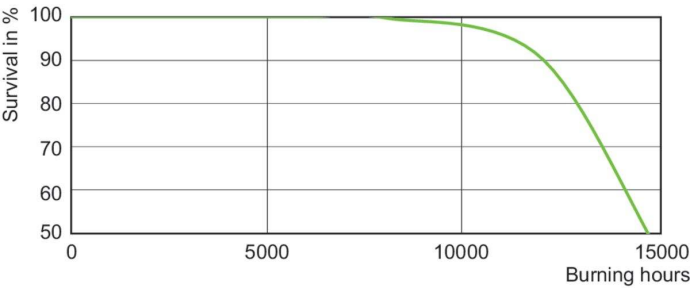

Life Expectancy Diagram - MST CosmoWh CPO-TW 90W/840 PGZ12 1CT

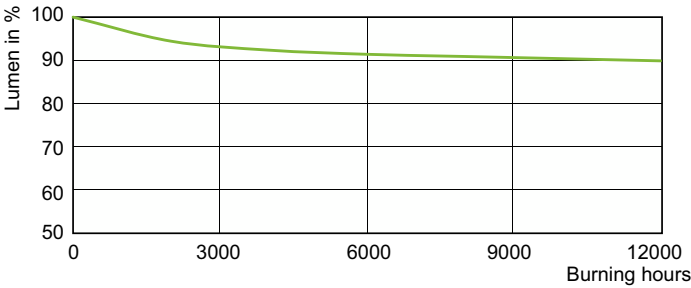

Lumen Maintenance Diagram - MST CosmoWh CPO-TW 90W/840 PGZ12 1CT

