



MASTER VALUE LEDs

pot LV

MASTER LEDspotLV 3.5W 827 MR11 24D 12/1

Delivering a warm, halogen-like accent beam, MASTER LEDspot LV is an ideal retrofit solution for spot and general lighting applications in the hospitality industry. It is particularly suited to public areas such as receptions, lobbies, corridors, stairwells and washrooms, where the light is on all the time. The robustly designed MASTER LEDspot offers a choice of beam angles for a clearly defined beam spread. There is no UV or IR in the beam, making it suitable for illuminating heat-sensitive objects (food, organic materials, paintings, etc.). The patented intelligent driver enables broad compatibility with existing electromagnetic and electronic halogen transformers. The dimmable versions drive further efficiencies, while helping to create the desired atmosphere.

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights


Product data

General Information			
Cap-Base	GU4 [GU4]	Beam Angle (Nom)	24 degree(s)
Nominal lifetime	40,000 hour(s)	Luminous Flux	210 lm
Switching Cycle	50,000	Luminous Intensity (Nom)	1,000 cd
Lighting Technology	LED	Color Designation	Warm White (WW)
EU RoHS compliant	Yes	Correlated Color Temperature (Nom)	2700 K
		Luminous Efficacy (rated) (Nom)	60.00 lm/W
		Color Consistency	<6
		Color rendering index (CRI)	80
		LLMF At End Of Nominal Lifetime (Nom)	70 %
Light Technical			
Color Code	827 [CCT of 2700K]		


MASTER VALUE LEDspot LV

Luminous Flux in 90° Cone (Rated)	200 lm
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	3.5 W
Lamp Current (Nom)	640 mA
Wattage Equivalent	20 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	instant full light s
Power Factor (Fraction)	0.5
Voltage (Nom)	12 V
Temperature	
T-Case Maximum (Nom)	201 °F
Controls and Dimming	
Dimmable	No

Dimensional drawing

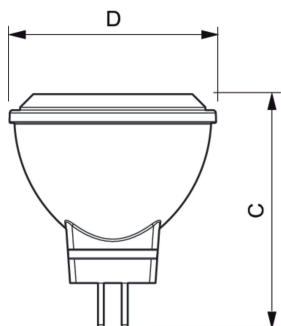


Photometric data

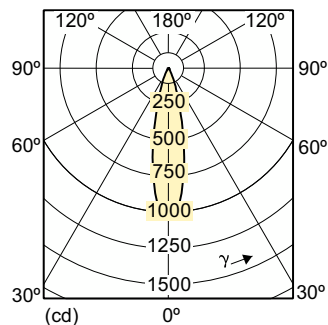

Light Distribution Diagram - MAS LEDspotLV 3.5-20W 827 MR11 24D

Mechanical and Housing	
Bulb Shape	MR11 [1.375inch/35mm]
Approval and Application	
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	4 kWh
Product Data	
Order product name	MAS LEDspotLV 3.5-20W 827 MR11 24D
Full product name	MASTER LEDspotLV 3.5W 827 MR11 24D 12/1
Full product code	871869641019600
Order code	302463
Material Nr. (12NC)	929001123802
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696410196
Numerator - Packs per outer box	12
EAN/UPC - Case	8718696410202

Product	D	C
MAS LEDspotLV 3.5-20W 827 MR11 24D	1-3/8 inch	1-5/8 inch

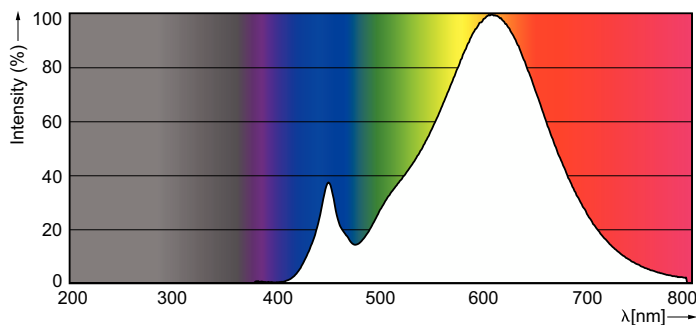

Spectral Power Distribution Colour - MAS LEDspotLV 3.5-20W 827 MR11 24D

MASTER VALUE LEDspot LV

