



MASTER VALUE LEDspot LV

MAS LEDspotLV DimTone 6.5–35W MR16 24D

Delivering a warm, halogen-like accent beam, MASTER LEDspot LV is an ideal retrofit solution for spot and general lighting applications in the hospitality industry. It is particularly suited to public areas such as receptions, lobbies, corridors, stairwells and washrooms, where the light is on all the time. The robustly designed MASTER LEDspot offers a choice of beam angles for a clearly defined beam spread. There is no UV or IR in the beam, making it suitable for illuminating heat-sensitive objects (food, organic materials, paintings, etc.). The patented intelligent driver enables broad compatibility with existing electromagnetic and electronic halogen transformers. The dimmable versions drive further efficiencies, while helping to create the desired atmosphere.

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

Product data

General Information	
Cap-Base	GU5.3 [GU5.3]
Nominal lifetime	25,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	822-827 [tunable warm white]


Beam Angle (Nom)	24 degree(s)
Luminous Flux	410 lm
Luminous Intensity (Nom)	1,800 cd
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	63.08 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

MASTER VALUE LEDspot LV

Luminous Flux in 90° Cone (Rated)	370 lm
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	6.5 W
Lamp Current (Nom)	800 mA
Wattage Equivalent	35 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	instant full light s
Power Factor (Fraction)	0.7
Voltage (Nom)	12 V
Temperature	
T-Case Maximum (Nom)	80 °C
Controls and Dimming	
Dimmable	Yes


Mechanical and Housing	
Bulb Shape	MR16 [2inch/50mm]
Approval and Application	
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	7 kWh
Product Data	
Order product name	MAS LEDspotLV DimTone 6.5-35W MR16 24D
Full product name	MAS LEDspotLV DimTone 6.5-35W MR16 24D
Full product code	871869644213500
Order code	929001127802
Material Nr. (12NC)	929001127802
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696442135
Numerator - Packs per outer box	10
EAN/UPC - Case	8718696442142

Dimensional drawing




Product	D	C
MAS LEDspotLV DimTone 6.5-35W MR16 24D	51 mm	50 mm

Photometric data



Light Distribution Diagram - MAS LEDspotLV DimTone 6.5-35W MR16 24D

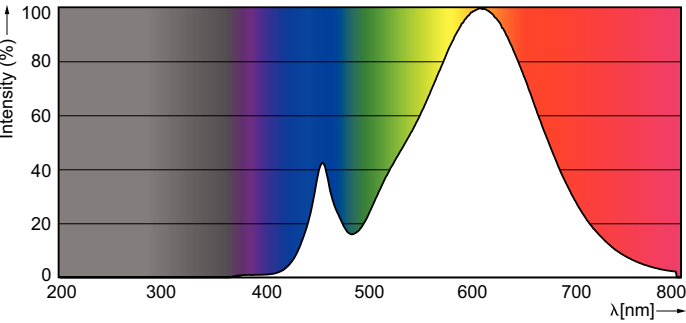

Spectral Power Distribution Colour - MAS LEDspotLV DimTone 6.5-35W MR16 24D

MASTER VALUE LEDspot LV

