PHILIPS Lighting



MASTER LEDspot LV

MASTER LED 7-50W 930 MR16 36D Dim CN

Delivering intense accent beam, MASTER LEDspot LV is an ideal retrofit solution for spot lighting. MASTER LEDspot LV is designed to replace halogen or incandescent spots. It realizes natural colors, enables cozy and comfortable ambience for residential, hospitality and emphasizes the beauty of merchandise in retail. New smaller housing provides perfect fitting with majority of luminaires in a market with a MR16 GU 5.3 holder. It not only employs Philips' patented solution to guarantee the broadest possible compatibility with standard 12V halogen electronic transformers, it also delivers high beam intensity which is equivalent to halogen MR16 spots. The dimming function enables to create the desired atmosphere and it works with broad selection of dimmers. Its high SDCM ensure stricter color consistency, that is maintained over product life. MASTER LEDspot LV delivers huge energy savings and minimizes maintenance cost without any compromise on light quality and lifetime, enabling residential and business owners to achieve a return on their investment within short period time.

Product data

General Information	
Cap-Base	GU5.3 [GU5.3]
Nominal lifetime	40,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	930 [CCT of 3000K]
Beam Angle (Nom)	36 degree(s)
Luminous Flux	440 lm
Luminous Intensity (Nom)	1,200 cd
Color Designation	White (WH)


Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	57.86 lm/W
Color Consistency	<6
Color rendering index (CRI)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	405 lm
Operating and Electrical	
Power Consumption	7 W
Lamp Current (Nom)	720 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	1s
Power Factor (Fraction)	0.7

MASTER LEDspot LV


Voltage (Nom)	12 V
Temperature	
T-Case Maximum (Nom)	92 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Shape	MR16 [2inch/50mm]
Approval and Application	
Energy Saving Product	Yes
Suitable For Accent Lighting	Yes

Energy Consumption kWh/1000 h	8 kWh	
Product Data		
Order product name	MASTER LED 7-50W 930 MR16 36D Dim CN	
Full product name	MASTER LED 7-50W 930 MR16 36D Dim CN	
Full product code	694793911346000	
Order code	929001153210	
Material Nr. (12NC)	929001153210	
Numerator - Quantity Per Pack	1	
EAN/UPC - Product/Case	6947939113460	
Numerator - Packs per outer box	10	
EAN/UPC - Case	6947939113477	

Dimensional drawing




Photometric data



Light Distribution Diagram - MASTER LED 7-50W 930 MR16 36D Dim CN


Product	D	с
MASTER LED 7-50W 930 MR16 36D Dim CN		51 mm



General uniform lighting - MASTER LED 7-50W 930 MR16 36D Dim CN

MASTER LEDspot LV

Photometric data

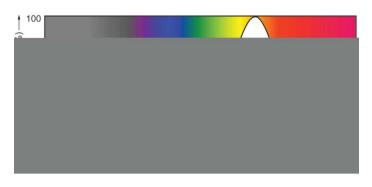

Spectral Power Distribution Colour - MASTER LED 7-50W 930 MR16 36D Dim CN



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, December 6 - data subject to change