



# LEDLamps

## LEDBulb 13-90W B22 3000K 230V A60 AU/PF

LED Lamps are a perfect fit for general lighting applications. Compatible with most existing fixtures and designed as a retrofit replacement for incandescent and halogen lamps, LED Lamps deliver huge energy savings and minimize maintenance cost

### Product data

General Information	
Cap-Base	B22 [B22]
Nominal lifetime	15,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes

Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	150 degree(s)
Luminous Flux	1,400 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	108 lm/W
Color Consistency	<7
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	13 W
Lamp Current (Nom)	110 mA

Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.5
Voltage (Nom)	220-240 V

Temperature	
T-Case Maximum (Nom)	80 °C

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Bulb Shape	A60M

Approval and Application	
Energy Saving Product	Yes
Suitable For Accent Lighting	No
Energy Consumption kWh/1000 h	13 kWh

Product Data	
Order product name	LEDBulb 13-90W B22 3000K 230V A60 AU/PF
Full product name	LEDBulb 13-90W B22 3000K 230V A60 AU/PF
Full product code	871869648216200

LEDLamps



Order code	929001163449
Material Nr. (12NC)	929001163449
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696482162

Numerator - Packs per outer box	6
EAN/UPC - Case	8718696559543

Dimensional drawing

Product	D	C
LEDBulb 13-90W B22 3000K 230V A60 AU/PF	60 mm	108 mm

Photometric data

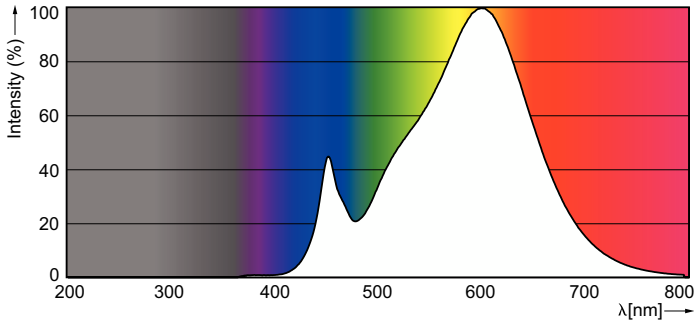

Light Distribution Diagram - LEDBulb 13-90W B22 3000K 230V A60 AU/PF

Spectral Power Distribution Colour - LEDBulb 13-90W B22 3000K 230V A60 AU/PF

