



# MASTER LEDspot LV AR111

# MAS LEDspotLV D 11-50W 927 AR111 24D

Delivering a warm, halogen-like accent beam, MASTER LEDspot LV AR111 is an ideal retrofit solution for spot and general lighting applications in the hospitality and retail industry. It is particularly suitable for general lighting where the light is on all the time, such as creative accent lighting applications in shops, restaurants, hotels, and especially for galleries, exhibitions and museums. The robustly designed MASTER LEDspot LV AR111 offers various beam angles for a clearly defined beam spread. There is no UV or IR in the beam, making it suitable for illuminating heat-sensitive objects (food, organic materials, paintings, etc.). The patented intelligent driver enables broad compatibility with existing electromagnetic and electronic halogen transformers. MASTER LEDspot LV AR111 delivers huge energy savings and minimises maintenance cost without any reduction in brightness.

#### **Product data**

General Information	
Cap-Base	G53 [G53]
Nominal lifetime	40,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	927
Beam Angle (Nom)	24 degree(s)
Luminous Flux	620 lm
Luminous Intensity (Nom)	2,900 cd
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K

Luminous Efficacy (rated) (Nom)	56.36 lm/W
Color Consistency	<6
Color rendering index (CRI)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	560 lm
Operating and Electrical	
Line Frequency	- Hz
Input Frequency	- Hz
Power Consumption	11 W
Lamp Current (Nom)	1,300 mA
Wattage Equivalent	50 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	instant full light s


Datasheet, 2023, April 29 data subject to change

# **MASTER LEDspot LV AR111**

Power Factor (Fraction)	0.7	
Voltage (Nom)	12 V	
Temperature		
T-Case Maximum (Nom)	70 °C	
Controls and Dimming		
Dimmable	Yes	
Mechanical and Housing		
Bulb Shape	AR111	
Approval and Application		
Suitable For Accent Lighting	Yes	


Energy Consumption kWh/1000 h	13 kWh
Product Data	
Order product name	MAS LEDspotLV D 11-50W 927 AR111 24D
Full product name	MAS LEDspotLV D 11-50W 927 AR111 24D
Full product code	871869651508200
Order code	929001169808
Material Nr. (12NC)	929001169808
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696515082
Numerator - Packs per outer box	6
EAN/UPC - Case	8718696515099

### Dimensional drawing




Product	D	С
MAS LEDspotLV D 11-50W 927 AR111 24D	111 mm	62 mm

#### Photometric data



Accent Lighting Spots - MAS LEDspotLV D 11-50W 927 AR111 24D



Light Distribution Diagram - MAS LEDspotLV D 11-50W 927 AR111 24D


## **MASTER LEDspot LV AR111**


#### Photometric data



Spectral Power Distribution Colour - MAS LEDspotLV D 11-50W 927 AR111 24D

#### Lifetime

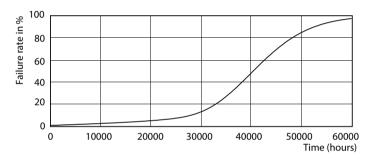



Life Expectancy Diagram - MAS LEDspotLV D 11-50W 927 AR111 24D

Lumen Maintenance Diagram - MAS LEDspotLV D 11-50W 927 AR111 24D



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.