



MASTER LEDspot LV AR111

MAS LEDspotLV D 11-50W 930 AR111 40D

Delivering a warm, halogen-like accent beam, MASTER LEDspot LV AR111 is an ideal retrofit solution for spot and general lighting applications in the hospitality and retail industry. It is particularly suitable for general lighting where the light is on all the time, such as creative accent lighting applications in shops, restaurants, hotels, and especially for galleries, exhibitions and museums. The robustly designed MASTER LEDspot LV AR111 offers various beam angles for a clearly defined beam spread. There is no UV or IR in the beam, making it suitable for illuminating heat-sensitive objects (food, organic materials, paintings, etc.). The patented intelligent driver enables broad compatibility with existing electromagnetic and electronic halogen transformers. MASTER LEDspot LV AR111 delivers huge energy savings and minimizes maintenance cost without any reduction in brightness.

产品数据

一般信息	
底盖	G53 [G53]
标称使用寿命	40,000 小时
切换循环	50,000
照明技术	LED
符合欧盟 RoHS 规范	是
灯技术	
颜色代码	930 [CCT of 3000K]
光束角度 (标称)	40 °
光通量	640 lm
发光强度 (标称)	1,150 cd
颜色名称	白色 (WH)
相关色温 (标称)	3000 K


光效 (额定) (标称)	58.18 lm/W
颜色一致性	<6
显色指数 (CRI)	90
标称使用寿命结束时灯的光通维持率 (标称)	70 %
90° 圆锥形光通量 (额定)	570 lm
操作和电气	
线频率	- Hz
输入频率	- Hz
功耗	11 W
灯具电流 (标称)	1,300 mA
瓦数相当	50 W
启动时间 (标称)	0.5 s
60% 灯光下的预热时间	即亮 s

MASTER LEDspot LV AR111

功率系数 (小数)	0.7
电压 (标称)	12 V
温度	
最大外壳温度 (标称)	70 °C
控制和调光	
可调光	是
机械和外壳	
灯泡外形	AR111
审批和申请	
适用于重点照明	是



能耗 kWh/1000 h	13 kWh
产品数据	
订单产品名称	MAS LEDspotLV D 11-50W 930 AR111 40D
完整的产品名称	MAS LEDspotLV D 11-50W 930 AR111 40D
完整产品代码	871869651514300
订购代码	929001170108
材料编号 (12NC)	929001170108
计算器 - 每包数量	1
EAN/UPC - 产品/箱	8718696515143
计算器 - 每个外包装箱中的包数	6
EAN/UPC - 案例	8718696515150

二维绘图

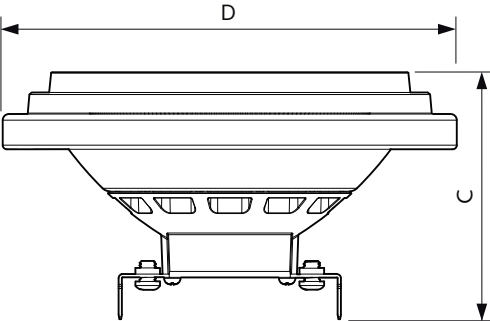

Product	D	C
MAS LEDspotLV D 11-50W 930 AR111 40D	111 mm	62 mm

光度数据

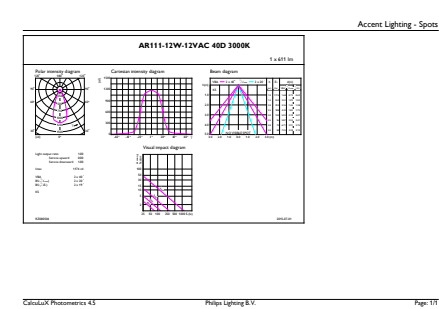


Accent Lighting Spots - MAS LEDspotLV D 11-50W 930 AR111 40D

Light Distribution Diagram - MAS LEDspotLV D 11-50W 930 AR111 40D


MASTER LEDspot LV AR111

光度数据




Spectral Power Distribution Colour - MAS LEDspotLV D 11-50W 930 AR111 40D

寿命

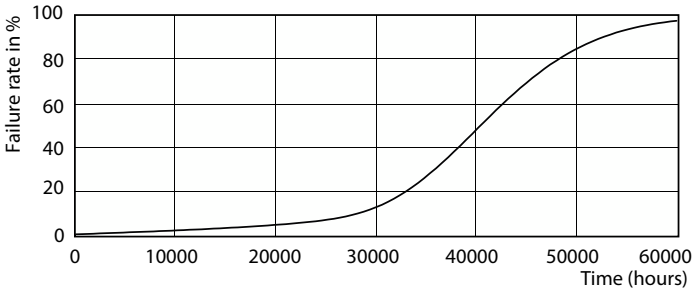

Life Expectancy Diagram - MAS LEDspotLV D 11-50W 930 AR111 40D

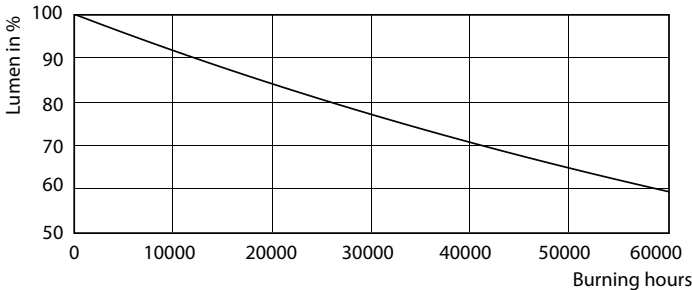

Lumen Maintenance Diagram - MAS LEDspotLV D 11-50W 930 AR111 40D

