



MASTER LEDspot PAR

MAS LEDspot CLA D 6-50W 830 PAR20 25D

With its robust design and warm-white beam of light, these new-generation PAR lamps are ideal for general lighting and spot lighting in the hospitality industry. There is a choice of dimmable and non-dimmable versions. They are especially suitable for public areas such as lobbies, corridors, stairwells, where the light is always on.

Product data

General Information	
Cap-Base	E27 [E27]
Nominal lifetime	25,000 hour(s)
Switching Cycle	25,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	25 degree(s)
Luminous Flux	515 lm
Luminous Intensity (Nom)	1,500 cd
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	89.17 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	515 lm
Operating and Electrical	
Line Frequency	50 Hz
Input Frequency	50 Hz
	·

Power Consumption	6 W
Lamp Current (Nom)	32 mA
Wattage Equivalent	50 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.85
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	80 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Shape	PAR20 [PAR 2.5 inch/63mm]
Approval and Application	
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	6 kWh
EyeComfort	Yes


Datasheet, 2023, November 15 data subject to change

MASTER LEDspot PAR

Product Data	
Order product name	MAS LEDspot CLA D 6-50W 830 PAR20 25D
Full product name	MAS LEDspot CLA D 6-50W 830 PAR20 25D
Full product code	871869671366200
Order code	929001317502
Material Nr. (12NC)	929001317502


Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696713662
Numerator - Packs per outer box	6
EAN/UPC - Case	8718696713679
•	

Dimensional drawing




Product	D	С
MAS LEDspot CLA D 6-50W 830 PAR20 25D	64 mm	85 mm


Photometric data



Accent Lighting Spots - MAS LEDspot CLA D 6-50W 830 PAR20 25D




Spectral Power Distribution Colour - MAS LEDspot CLA D 6-50W 830 PAR20 25D



Light Distribution Diagram - MAS LEDspot CLA D 6-50W 830 PAR20 25D

MASTER LEDspot PAR

Lifetime

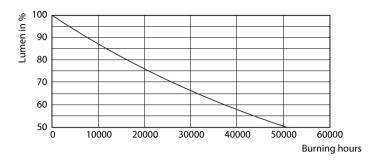

Life Expectancy Diagram - MAS LEDspot CLA D 6-50W 830 PAR20 25D

Lumen Maintenance Diagram - MAS LEDspot CLA D 6-50W 830 PAR20 25D



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.