



Beautiful sparkle, reliable life

MASTERColour CDM-TC

Range of single-ended, very compact, high-efficiency, discharge lamps with a stable color over lifetime and a crisp, sparkling light

Benefits

- Long lamp life compared with incandescent and halogen lamps
- UV-Block quartz outer bulb for reduced fading risks
- Stable color impression over lifetime
- High lamp efficacy results in low operating costs and low heat generation (which enhances comfort for shoppers and staff)

Features


- Crisp white light
- Superior color quality
- Allows very small-size luminaires designs that give high beam intensities

Application


- Accent lighting display lighting with sparkling effect
- General and decorative lighting

MASTERCLOUR CDM-TC


Versions

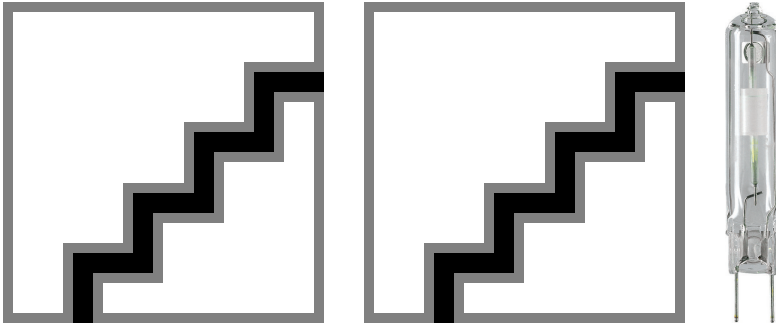


Dimensional drawing



Product	D (max)	D	O	L (min)	L (max)	L	C (max)
MASTERColour CDM-TC 70W/830 G8.5 1CT/12	15 mm	0.5 in	7 mm	51 mm	53 mm	52 mm	85 mm
MASTERColour CDM-TC 70W/830 G8.5 1CT/12	15 mm	0.5 in	7 mm	51 mm	53 mm	52 mm	85 mm



Product	D (max)	D	O	L (min)	L (max)	L	C (max)
MASTERColour CDM-TC 35W/842 G8.5 1CT/12	15 mm	0.5 in	5 mm	51 mm	53 mm	52 mm	85 mm
MASTERColour CDM-TC 35W/830 G8.5 1CT/12	15 mm	0.5 in	5 mm	51 mm	53 mm	52 mm	85 mm



Product	D (max)	O	L (min)	L (max)	L	C (max)
MASTERColour CDM-TC 70W/842 G8.5 1CT/12	15 mm	5 mm	51 mm	53 mm	52 mm	85 mm

MASTERCcolour CDM-TC

Controls and Dimming

Dimmable	No
----------	----

Operating and Electrical

Re-ignition Time (Min) (Max)	15 min
------------------------------	--------

General Information

Cap-Base	G8.5
Life To 50% Failures (Nom)	12000 h
Operating Position	UNIVERSAL

Mechanical and Housing

Bulb Finish	Clear (CL)
Bulb Material	UV-Block Quartz
Bulb Shape	T14

Approval and Application

Order Code	Full Product Name	Energy Consumption kWh/1000 h	Energy	
			Efficiency Label (EEL)	Mercury (Hg) Content (Nom)
48459300	MASTERCcolour CDM-TC 35W/830 G8.5 1CT/12	43 kWh	A	3.1 mg
48461600	MASTERCcolour CDM-TC 35W/842 G8.5 1CT/12	43 kWh	A	2.7 mg
48463000	MASTERCcolour CDM-TC 70W/830 G8.5 1CT/12	80 kWh	A+	4.6 mg
20167615	MASTERCcolour CDM-TC 70W/830 G8.5 1CT/12	80 kWh	A+	4.6 mg
48465400	MASTERCcolour CDM-TC 70W/842 G8.5 1CT/12	80 kWh	A	7 mg

Operating and Electrical (1/2)

Order Code	Full Product Name	Lamp Current (EM) (Nom)	Voltage (Max)	Voltage (Min)	Voltage (Nom)
48461600	MASTERCcolour CDM-TC 35W/842 G8.5 1CT/12	-	93 V	77 V	85 V
48463000	MASTERCcolour CDM-TC 70W/830 G8.5 1CT/12	-	87 V	78 V	83 V

Order Code	Full Product Name	Lamp Current (EM) (Nom)	Voltage (Max)	Voltage (Min)	Voltage (Nom)
48465400	MASTERCcolour CDM-TC 70W/842 G8.5 1CT/12	-	93 V	83 V	88 V

Operating and Electrical (2/2)

Order Code	Full Product Name	Power (Rated) (Min)	Power (Rated) (Nom)
48461600	MASTERCcolour CDM-TC 35W/842 G8.5 1CT/12	39.0 W	39.0 W
48463000	MASTERCcolour CDM-TC 70W/830 G8.5 1CT/12	-	73 W

Order Code	Full Product Name	Power (Rated) (Min)	Power (Rated) (Nom)
48465400	MASTERCcolour CDM-TC 70W/842 G8.5 1CT/12	-	73 W

General Information

Order Code	Full Product Name	Life To 10% Failures (Nom)	Life To 20% Failures (Nom)	Life To 5% Failures (Nom)
48461600	MASTERCcolour CDM-TC 35W/842 G8.5 1CT/12	8000 h	9000 h	6000 h
48463000	MASTERCcolour CDM-TC 70W/830 G8.5 1CT/12	8000 h	9000 h	9000 h

Order Code	Full Product Name	Life To 10% Failures (Nom)	Life To 20% Failures (Nom)	Life To 5% Failures (Nom)
48465400	MASTERCcolour CDM-TC 70W/842 G8.5 1CT/12	8000 h	9000 h	9000 h

MASTERCcolour CDM-TC

Luminaire Design Requirements

Order Code	Full Product Name	Bulb Temperature (Max)
48459300	MASTERCcolour CDM-TC 35W/830 G8.5 1CT/12	500 °C
48461600	MASTERCcolour CDM-TC 35W/842 G8.5 1CT/12	500 °C
48463000	MASTERCcolour CDM-TC 70W/830 G8.5 1CT/12	550 °C

Order Code	Full Product Name	Bulb Temperature (Max)
20167615	MASTERCcolour CDM-TC 70W/830 G8.5 1CT/12	550 °C
48465400	MASTERCcolour CDM-TC 70W/842 G8.5 1CT/12	700 °C

Light Technical (1/2)

Order Code	Full Product Name	Chromaticity	Chromaticity	Colour Code	Colour Designation
		Coordinate X (Nom)	Coordinate Y (Nom)		
48459300	MASTERCcolour CDM-TC 35W/830 G8.5 1CT/12	0.432	0.394	830	Warm White (WW)
48461600	MASTERCcolour CDM-TC 35W/842 G8.5 1CT/12	0.374	0.369	842	Cool White (CW)
48463000	MASTERCcolour CDM-TC 70W/830 G8.5 1CT/12	0.439	0.398	830	Warm White (WW)

Order Code	Full Product Name	Chromaticity	Chromaticity	Colour Code	Colour Designation
		Coordinate X (Nom)	Coordinate Y (Nom)		
20167615	MASTERCcolour CDM-TC 70W/830 G8.5 1CT/12	0.439	0.398	830	Warm White (WW)
48465400	MASTERCcolour CDM-TC 70W/842 G8.5 1CT/12	0.362	0.363	842	Cool White (CW)

Light Technical (2/2)

Order Code	Full Product Name	Correlated Colour Temperature	Colour Rendering Index	Lumen Maintenance	Lumen Maintenance	Lumen Maintenance	Lumen Maintenance	Lumen Maintenance	Luminous Efficacy	Luminous Flux
		(Nom)	(Nom)	10000 h (Nom)	2000 h (Min)	2000 h (Nom)	5000 h (Min)	5000 h (Nom)	(rated) (Nom)	(Rated) (Nom)
48459300	MASTERCcolour CDM-TC 35W/830 G8.5 1CT/12	3000 K	81	50 %	70 %	80 %	50 %	65 %	79 lm/W	3100 lm
48461600	MASTERCcolour CDM-TC 35W/842 G8.5 1CT/12	4200 K	85	70 %	75 %	85 %	70 %	80 %	79 lm/W	3100 lm
48463000	MASTERCcolour CDM-TC 70W/830 G8.5 1CT/12	3000 K	83	65 %	75 %	85 %	65 %	75 %	88 lm/W	6400 lm
20167615	MASTERCcolour CDM-TC 70W/830 G8.5 1CT/12	3000 K	83	65 %	75 %	85 %	65 %	75 %	88 lm/W	6400 lm
48465400	MASTERCcolour CDM-TC 70W/842 G8.5 1CT/12	4200 K	89	65 %	70 %	80 %	65 %	75 %	79 lm/W	5800 lm

Colour Rendering Diagrams

