

Simple, robust magnetic ballast

HID-Basic Semi-Parallel ballasts for SON/CDM/MH lamps

The HID Basic Semi-Parallel ballast is an impregnated (HID standard) electromagnetic copper/iron ballast for use with an external ignitor for HID lamps.

Benefits

- Limited volume of ballast coil; also lightweight
- Simple installation and cabling

Features


- Orthocyclic winding process
- Ballasts equipped with screw terminal blocks as standard
- Earthing-while-mounting facility (HID Standard ballasts)
- Low watt losses

Application





- For use with SON and HPI (PLUS) lamps in road, public, area and industry lighting
- For use with MHN/CDM lamps in shop, lobby and city beautification applications
- HID-Basic ballasts should be restricted to built-in situations where relative humidity is limited.

HID-Basic Semi-Parallel ballasts for SON/CDM/MH lamps

Versions

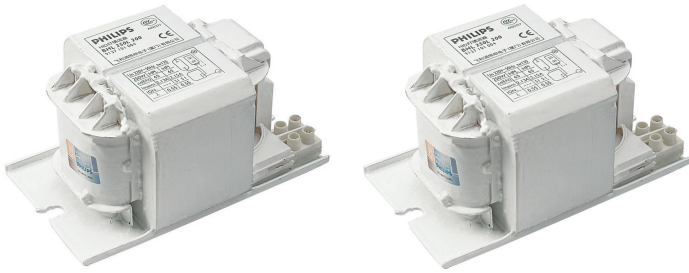

Dimensional drawing



Product	D1	C1	A1	A2	B1
BSN 70L 300I	6.2 mm	51.5 mm	117.0 mm	102 mm	57.1 mm
BSN 250L 300I TS	6.2 mm	64.5 mm	150.0 mm	135 mm	75.5 mm
BSN 400L 300I TS	6.2 mm	82 mm	165.0 mm	150 mm	96.5 mm
BSN 100L 300I	6.2 mm	51.5 mm	122.0 mm	107 mm	57.1 mm
BSN 150L 300I TS	6.2 mm	64.5 mm	125.0 mm	110 mm	75.5 mm

Product	D1	C1	A1	A2	B1
BSNE 250L 300I TS	6.3 mm	64.5 mm	165.0 mm	144 mm	75.0 mm
BSNE 150L 300I TS	6.3 mm	64.5 mm	120.0 mm	99.0 mm	75.0 mm
BSNE 400L 300I TS	6.3 mm	82 mm	165.0 mm	144 mm	96.0 mm



HID-Basic Semi-Parallel ballasts for SON/CDM/MH lamps

Operating and Electrical

Input Frequency	50 Hz
Input Voltage	220 V

System characteristics

Order Code	Full Product Name	Rated Ballast-Lamp Power
913710103750	BSN 100L 300I	100 W
913710104550	BSN 70L 300I	70 W
913710109142	BSN 150L 300I TS	150 W
913710109342	BSN 250L 300I TS	250 W

Order Code	Full Product Name	Rated Ballast-Lamp Power
913710109542	BSN 400L 300I TS	400 W
913713019359	BSNE 150L 300I TS	150 W
913713019459	BSNE 250L 300I TS	250 W
913713019559	BSNE 400L 300I TS	400 W

