



# The new generation of energy-saving and affordable T5 mains tube lighting

## Essential LED tubes T5 Mains

The Essential LEDtube T5 is an affordable LED solution suitable for replacing T5 fluorescent lamps. Thanks to a unique design, Philips Essential LED tube T5 Mains can be directly installed in luminaires operating on mains power connection. The product provides a natural lighting effect for use in general lighting applications, as well as instant energy savings – an environmentally friendly solution.

### Benefits

- Up to 50% energy saving compared with conventional fluorescent systems
- Easy installation: retrofit replacement of existing T5 lamps improving the quality of light
- Lower maintenance costs

### Features

- Retrofit solution with a long lifetime of 25,000 hrs
- Excellent quality of light with CRI >80
- High power factor >0,9
- Instant on, no flicker or buzz

### Application


- Office, Shop, Education, Retail
- Industrial facilities and warehouses

# Essential LED tubes T5 Mains

## Versions



## Dimensional drawing

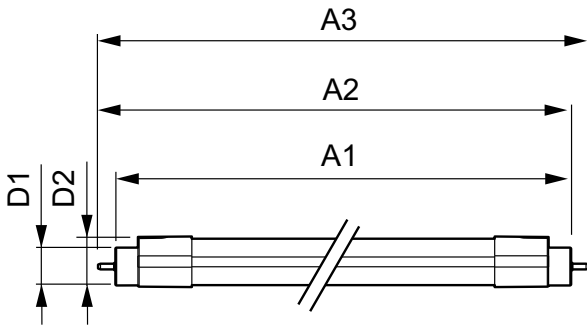

Product	D1	D2	A1	A2	A3
MASTER LEDtube 600mm 7.5W865 G5 I	15.8 mm	21.0 mm	548.0 mm	555.0 mm	562.0 mm
MASTER LEDtube 1200mm 13W840 G5 I	15.8 mm	21.0 mm	1148.0 mm	1155.0 mm	1162.0 mm
MASTER LEDtube 600mm 7.5W840 G5 I	15.8 mm	21.0 mm	548.0 mm	555.0 mm	562.0 mm
MASTER LEDtube 1200mm 13W865 G5 I	15.8 mm	21.0 mm	1148.0 mm	1155.0 mm	1162.0 mm

## Essential LED tubes T5 Mains

### Approval and Application

Energy Efficiency Label (EEL) A+

### Controls and Dimming

Dimmable No

### Operating and Electrical

Input Frequency 50 to 60 Hz

Starting Time (Nom) 0.5 s

### General Information

Cap-Base G5

Nominal Lifetime (Nom) 40000 h

Rated Lifetime (Hours) 40000 h

Switching Cycle 50000X

### Light Technical

Beam Angle (Nom) 160 °

Colour Rendering Index (Nom) 83

Llmf At End Of Nominal Lifetime (Nom) 70 %

Rated Beam Angle 160 °

### Temperature

T-Ambient (Max) 45 °C

T-Ambient (Min) -20 °C

T-Storage (Max) 65 °C

T-Storage (Min) -40 °C

### Approval and Application

Order Code	Full Product Name	Energy Consumption kWh/1000 h
929001131110	MASTER LEDtube 1200mm 13W840 G5 I	15 kWh
929001131210	MASTER LEDtube 1200mm 13W865 G5 I	15 kWh
929001154910	MASTER LEDtube 600mm 7.5W840 G5 I	9 kWh
929001155010	MASTER LEDtube 600mm 7.5W865 G5 I	9 kWh

### Operating and Electrical

Order Code	Full Product Name	Voltage (Nom)	Power (Rated) (Nom)
929001131110	MASTER LEDtube 1200mm 13W840 G5 I	33 V	13 W
929001131210	MASTER LEDtube 1200mm 13W865 G5 I	33 V	13 W

Order Code	Full Product Name	Voltage (Nom)	Power (Rated) (Nom)
929001154910	MASTER LEDtube 600mm 7.5W840 G5 I	19 V	7.5 W
929001155010	MASTER LEDtube 600mm 7.5W865 G5 I	19 V	7.5 W

### Light Technical

Order Code	Full Product Name	Colour Code	Correlated		Luminous Flux (Rated) (Nom)
			Colour Temperature (Nom)	Luminous Flux (Nom)	
929001131110	MASTER LEDtube 1200mm 13W840 G5 I	840	4000 K	1600 lm	1600 lm
929001131210	MASTER LEDtube 1200mm 13W865 G5 I	865	6500 K	1600 lm	1600 lm
929001154910	MASTER LEDtube	840	4000 K	800 lm	800 lm

Order Code	Full Product Name	Colour Code	Correlated		Luminous Flux (Rated) (Nom)
			Colour Temperature (Nom)	Luminous Flux (Nom)	
929001154910	MASTER LEDtube 600mm 7.5W840 G5 I	840	4000 K	800 lm	800 lm
929001155010	MASTER LEDtube 600mm 7.5W865 G5 I	865	6500 K	800 lm	800 lm

# Essential LED tubes T5 Mains

## Temperature

Order Code	Full Product Name	T-Case Maximum (Nom)
929001131110	MASTER LEDtube 1200mm 13W840 G5 I	50 °C
929001131210	MASTER LEDtube 1200mm 13W865 G5 I	50 °C
929001154910	MASTER LEDtube 600mm 7.5W840 G5 I	60 °C
929001155010	MASTER LEDtube 600mm 7.5W865 G5 I	60 °C

