

# SmartForm TBS417

## TBS417 1x49W/830 HFP D8 W SC

SmartForm recessed semi-modular, 1, 49 W, 830 warm white, HF Performer, Semi-high-gloss optic 3D micro-lamellae, Plug-in connector 3-pole Wieland/Adels compatible

Reflecting Philips' drive for simplicity and sustainability, SmartForm recessed is a complete family of highly versatile modular and semi-modular luminaires. These luminaires are available with a choice of LED or MASTER TL5 light sources in very small, slender versions. Designed to fit in a wide range of ceiling types, this complete family can fulfill the majority of project requirements in most applications. Energy efficiency. As well as incorporating energy-efficient LED or TL5 light sources and a range of Philips electronic ballasts, the SmartForm recessed family can be equipped with lighting controls for presence detection and daylight regulation (ActiLume) or daylight regulation only (Luxsense) in order to reduce energy consumption (W/m<sup>2</sup> is very low). In this way, this Green Flagship range also reduces the overall cost of ownership as well as CO<sub>2</sub> levels, making SmartForm an environmentally friendly choice. SmartForm recessed TBS417 – 'light line beam'. Slender SmartForm recessed continuous light-line luminaires are designed for integration in linear exposed T-bar and plaster ceilings. 'Light line beam' TBS417 1-lamp. Continuous light line for micro-optics, asymmetrical optic and rimless MLO and Opal covers. All versions TL5: 14/24 W; 21/39 W; 28/54 W; 35/49/80 W. Luminaire width is 90 mm. 'Light line beam' TBS417 2-lamps. Continuous light line for mini-optics, 2-lamps. All versions TL5: 14/24 W; 21/39 W; 28/54 W; 35/49/80 W. Luminaire width is 115 mm.

### Product data


General Information			
Lamp family code	TL5 [TL5]	Feed-through wiring	-
Cap-Base	G5 [G5]	Product family code	TBS417 [SmartForm recessed semi-modular]
Gear	HFP [HF Performer]	Lighting Technology	Fluorescent
		Embedded control	-

SmartForm TBS417

CE mark	Yes
Flammability mark	For mounting on normally flammable surfaces
ENEC mark	ENEC mark
Glow-wire test	Temperature 850 °C, duration 5 s
Light Technical	
Luminous Flux	4,900 lm
Luminous Efficacy (rated) (Nom)	100 lm/W
Number of light sources	1
Light source color	830 warm white
Optic type	Semi-high-gloss optic 3D micro-lamellae
Optical cover type	-
Operating and Electrical	
Input Voltage	220 to 240 V
Line Frequency	50 to 60 Hz
Power Consumption	49 W
Connection	Plug-in connector 3-pole Wieland/Adels compatible
Cable	-
Temperature	
Ambient temperature range	+10 to +40 °C
Mechanical and Housing	
Housing Material	Steel
Reflector material	Aluminum
Optic material	Aluminum
Fixation material	-

Housing Color	White
Overall length	1,508 mm
Approval and Application	
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Protection class IEC	Safety class I
Initial Performance (IEC Compliant)	
Luminous flux tolerance	+/-10%
Power consumption tolerance	+/-10%
Application Conditions	
Maximum dim level	1%
Suitable for random switching	No
Product Data	
Order product name	TBS417 1x49W/830 HFP D8 W SC
Full product name	TBS417 1x49W/830 HFP D8 W SC
Full product code	871794399081800
Order code	910501929303
Material Nr. (12NC)	910501929303
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8717943990818
Numerator - Packs per outer box	1
EAN/UPC - Case	8717943990818

Dimensional drawing

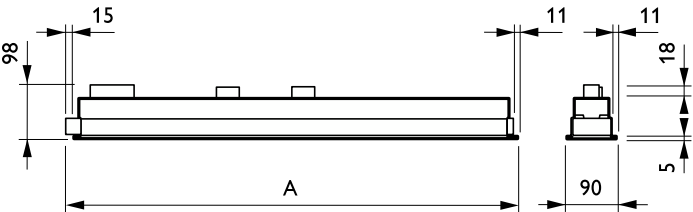

Product	A
TBS417 1x49W/830 HFP D8 W SC	1,508 mm

