



# TrueLine, recessed

## RC530B LED15S/840 PSD W8L113 PCV PI5

TrueLine Recessed OC - LED Module, system flux 1500 lm - 840 neutral white - Power supply unit with DALI interface - Plaster ceiling version - Push-in connector 5-pole (PI) - 1130 mm

Architects need a lighting solution that matches the interior architecture of the property they are working on. They want a light line with an elegant design and very high light levels. Specifiers need luminaires that enable them to save energy while at the same time providing the right level of light, in compliance with office lighting norms. TrueLine, recessed is able to meet both sets of requirements. TrueLine is also available in a suspended version.

### Product data

General Information		
Number of light sources	1 [ 1 pc]	Cable
Lamp family code	LED15S [ LED Module, system flux 1500 lm]	
Light source colour	840 neutral white	Protection class IEC
Cap base	- [ -]	Safety class I (I)
Light source replaceable	No	Glow-wire test
Number of gear units	1 unit	650/5 [ Temperature 650 °C, duration 5 s]
Gear	-	Flammability mark
Driver/power unit/transformer	PSD [ Power supply unit with DALI interface]	F [ For mounting on normally flammable surfaces]
Driver included	Yes	Type description
Optic type	No [ -]	OC [ Office compliant version]
Optical cover/lens type	PM [ PMMA bowl/cover]	CE mark
Luminaire light beam spread	100°	ENEC mark
Embedded control	No [ -]	ENEC plus mark
Control interface	DALI	UL mark
Connection	Push-in connector 5-pole (PI)	-
		Warranty period
		5 years
		Remarks
		*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore

## TrueLine, recessed

	the median useful life (B50) value also represents the B10 value.
Constant light output	No
Number of products on MCB	24
RoHS mark	RoHS mark
Accessory PFC	N/A
Product Family Code	RC530B [ TrueLine Recessed OC]
Unified glare rating CEN	16

### Operating and Electrical

Input voltage	220-240 V
Input frequency	50 to 60 Hz
Control signal voltage	0-16 V DC DALI
Inrush current	19 A
Inrush time	0.28 ms
Power factor (min.)	0.9

### Controls and Dimming

Dimmable	Yes
----------	-----

### Mechanical and Housing

Geometry	Width 0.08 m, length 1.13 m
Housing configuration	PCV [ Plaster ceiling version]
Housing material	Steel
Reflector material	-
Optic material	-
Optical cover/lens material	Polymethyl methacrylate
Gear tray material	Steel
Fixation material	Steel
Optical cover/lens finish	Frosted
Overall length	1152 mm
Overall width	115 mm
Overall height	136 mm
Length	1130 mm
Colour	White

### Approval and Application

Ingress protection code	IP20 [ Finger-protected]
-------------------------	--------------------------

Mech. impact protection code	IK02 [ 0.2 J standard]
------------------------------	------------------------

### Initial Performance (IEC Compliant)

Initial luminous flux	1500 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	150 lm/W
Init. Corr. colour temperature	4000 K
Init. colour rendering index	≥80
Initial chromaticity	(0.38, 0.38) SDCM <3
Initial input power	10 W
Power consumption tolerance	+/-10%

### Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* 50000 h	L85

### Application Conditions


Ambient temperature range	+10 to +40 °C
Performance ambient temperature Tq	25 °C
Maximum dimming level	1%
Suitable for random switching	No

### Product Data

Full product code	871869906288000
Order product name	RC530B LED15S/840 PSD W8L113 PCV PI5
EAN/UPC – product	8718699062880
Order code	06288000
Numerator – quantity per pack	1
Numerator – packs per outer box	1
Material no. (12NC)	910502048003
Net weight (piece)	2.600 kg



# TrueLine, recessed

## Dimensional drawing

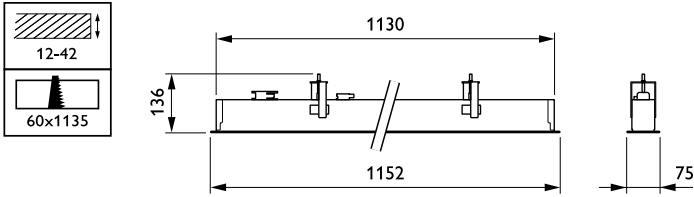

### TrueLine recessed RC515B, RC530B-RC534B

## Photometric data

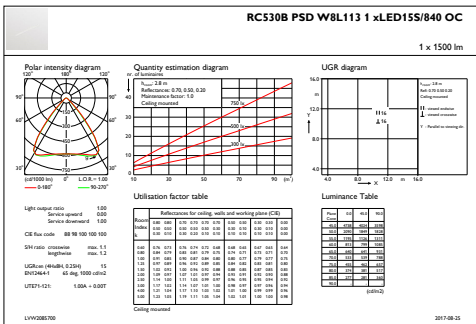

### IFGU1\_RC530BPSDW8L1131xLED15S840OC

### IFPC1\_RC530BPSDW8L1131xLED15S840OC

