



eW Cove MX Powercore Precision Dimming

eW Cove MX Powercore, 3000 K, 125° x 120° Beam Angle, 12.5 W/ft, 305 mm (1 ft)

eW Cove MX Powercore, 3000 K, 125° x 120° Beam Angle, 12.5 W/ft, 305 mm (1 ft)

With its superior light output, wide beam angle, and range of fixed colours and colour temperatures, eW Cove MX Powercore Precision Dimming can be used for accent lighting and indirect general illumination, as well as the full range of wall and ceiling cove applications. This fixture meets or exceeds the performance of comparable linear fluorescent strip cove lights while lowering installation, energy, and maintenance costs. eW Cove MX Powercore Precision Dimming offers environmentally conscious buyers a green, energy-efficient lighting solution without sacrificing quality or quantity of light. Integrated Powercore technology ensures rapid, efficient and accurate control of power output to the fixture directly from line voltage, eliminating the need for external power supplies.

Product data

General information		Optic type	WB [Wide beam]
Number of light sources	10 [10 pcs]	Optical cover/lens type	PC [Polycarbonate bowl/cover]
Lamp family code	LED-HB [LED High Brightness]	Luminaire light beam spread	125° x 120°
Light source colour	Warm white	Protection class IEC	Safety class I
Light source replaceable	No	Ready-to-install	Ready-to-install
Driver/power unit/transformer	PSR [Power supply unit regulating]	Type description	No
Driver included	Yes	CE mark	CE mark


eW Cove MX Powercore Precision Dimming

UL mark	UL and cUL mark
CCC mark	CCC mark
Operating and electrical	
Input Voltage	100 to 277 V
Input frequency	50 to 60 Hz
Controls and dimming	
Dimmable	Yes
Mechanical and housing	
Housing material	Aluminium die-cast
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Length	305 mm
Colour	White
Approval and application	
Ingress protection code	IP20 [Finger-protected]
FCC mark	FCC Class B
Initial performance (IEC compliant)	
Initial luminous flux (system flux)	534 lm
Initial LED luminaire efficacy	45.3 lm/W
Init. Corr. Colour Temperature	3000 K
Init. Colour rendering index	83
Initial input power	12.5 W
Over time performance (IEC compliant)	
Lumen Maintenance 50% at 25 °C Calculated	100000
Lumen Maintenance 50% at 25 °C Reported	65000

Lumen Maintenance 50% at 50 °C	100000
Calculated	
Lumen Maintenance 50% at 50 °C Reported	65000
Lumen Maintenance 70% at 25 °C Calculated	100000
Lumen Maintenance 70% at 25 °C Reported	65000
Lumen Maintenance 70% at 50 °C	100000
Calculated	
Lumen Maintenance 70% at 50 °C Reported	65000
Application conditions	
Ambient temperature range	-20 to +50 °C
Maximum dimming level	10% (depends on dimmer, ELV)
Suitable for random switching	Yes
Product data	
Full product code	871829137626299
Order product name	BCX416 10xLED-HB/3000 100-277V WB
EAN/UPC – product	8718291376262
Order code	523-000050-18
Local order code	BCX416103000WB
SAP numerator – quantity per pack	1
Numerator – packs per outer box	20
SAP material	910503701727
Net Weight (Piece)	0.400 kg
Commercial Code	523-000050-18
Catalogue number description	eW Cove MX Powercore, 3000 K, 125° x 120° Beam Angle, 12.5 W/ft, 305 mm (1 ft)



Dimensional drawing

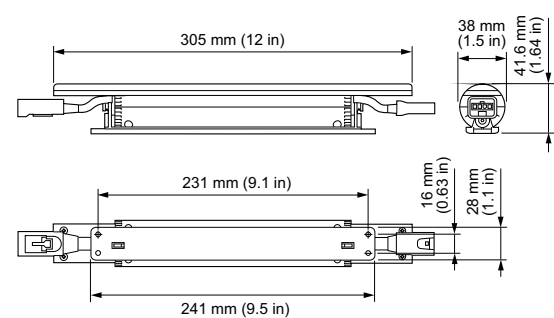

BCX416 10xLED-HB/3000 100-277V WB

eW Cove MX Powercore Precision Dimming

