



CoreLine Surface-mounted

SM134V LED37S/840 W20L120 IA1 NOC

Coreline Surface - 840 neutral white - Power supply unit regulating external

Whether for a new building or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new CoreLine Surface-mounted range of LED products can be used to replace functional luminaires in general lighting applications. The process of selecting, installing and maintaining is so easy – it's a simple switch. ;InterAct Ready luminaires with integrated wireless communications in this family available, to be used with InterAct gateways, sensors and software.

Product data

General Information	
Light source color	840 neutral white
Light source replaceable	No
Number of gear units	1 unit
Driver/power unit/transformer	Power supply unit regulating external
Driver included	Yes
Optic type	Wide beam
Luminaire light beam spread	93°
Control interface	Internal (no external connection)
Connection	Push-in connector and pull relief
Cable	-
Protection class IEC	Safety class I
Glow-wire test	Temperature 850 °C, duration 30 s
Flammability mark	For mounting on normally flammable surfaces
CE mark	CE mark
ENEC mark	ENEC mark
Warranty period	5 years
Constant light output	No
Number of products on MCB of 16 A type B	24
RoHS mark	RoHS mark
Product family code	SM134V [Coreline Surface]
Unified glare rating CEN	22
Operating and Electrical	
Input Voltage	220-240 V
Input Frequency	50 to 60 Hz

CoreLine Surface-mounted

Inrush current	22 A
Inrush time	0.275 ms
Power Factor (Min)	0.9

Controls and Dimming

Dimmable	Wireless Dim
----------	--------------

Mechanical and Housing

Housing Material	Steel
Reflector material	Polycarbonate
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	-
Optical cover/lens finish	Textured
Overall length	1170 mm
Overall width	197 mm
Overall height	47 mm
Color	White

Approval and Application

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	3700 lm
Luminous flux tolerance	+/-8%
Initial LED luminaire efficacy	104.5 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	≥80

Initial chromaticity	(0.38, 0.38) SDCM <3
Initial input power	35.4 W
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life	5 %
50000 h	
Lumen maintenance at median useful life*	L75
50000 h	

Application Conditions


Ambient temperature range	+10 to +40 °C
Performance ambient temperature Tq	25 °C
Maximum dim level	1%
Suitable for random switching	Yes

Product Data

Full product code	871869699662100
Order product name	SM134V LED37S/840 W20L120 IA1 NOC
EAN/UPC - Product	8718696996621
Order code	910925865183
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	910925865183
Net Weight (Piece)	3.400 kg



Dimensional drawing

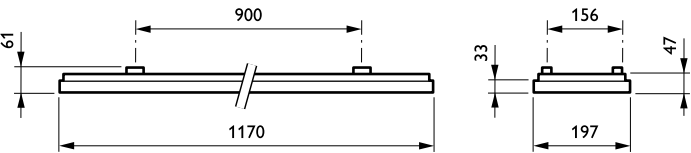

CoreLine Surface-mounted SM134V

CoreLine Surface-mounted

