



GreenUp Highbay G2

BY560P LED105/NW PSU HRO CAU

GreenUp Highbay G2, 75 W, 10500 lm, 4000 K, 45° x 90°

Height is not an issue any more, maximum 16m movement detection together with the wireless ZigBee control, GreenUp HighBay G2,light up your space smartly.

Warnings and Safety

- The product is IPX0 & as such is not protected against water ingress & as such we strongly recommend that the environment in which the luminaire is to be installed is suitably checked
- If the above advice is not taken and the luminaires are subject to water ingress, Philips / Signify cannot guarantee safe failure & product warranty will become void

Product data

General Information	
Light source replaceable	No
Number of gear units	1 unit
Driver included	Yes
Light source engine type	LED
CE mark	CE mark
Warranty period	3 years
Flammability mark	For mounting on normally flammable surfaces
ENEC mark	-
Glow-wire test	Temperature 650 °C, duration 5 s
Light Technical	
Luminous Flux	10,500 lm
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	140 lm/W
Color rendering index (CRI)	>80


Beam angle of light source	- degree(s)
Light source color	840 neutral white
Optic type	High-rack optic
Optical cover type	Linear-lens array in polycarbonate cover
Luminaire light beam spread	45° x 90°
Operating and Electrical	
Input Voltage	220 to 240 V
Line Frequency	50 to 60 Hz
Inrush current	19 A
Inrush time	280 ms
Power Consumption	75 W
Power Factor (Fraction)	0.95
Connection	-
Cable	Cable 3.0 m with plug
Number of products on MCB of 16 A type B 24	

GreenUp Highbay G2

Temperature	
Ambient temperature range	-20 to +45 °C
Controls and Dimming	
Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Control interface	-
Constant light output	No
Mechanical and Housing	
Housing Material	Aluminum extruded
Reflector material	-
Optic material	Polycarbonate
Optical cover material	Polycarbonate
Fixation material	-
Housing Color	Aluminum and white
Optical cover finish	Clear
Overall length	525 mm
Overall width	190 mm
Approval and Application	
Ingress protection code	IP40 [Wire-protected]
Mech. impact protection code	IK03 [0.3 J]
Protection class IEC	Safety class I
Initial Performance (IEC Compliant)	
Luminous flux tolerance	+/-10%

Initial chromaticity	(0.38.0.38)SDCM<5
Power consumption tolerance	+/-10%
Over Time Performance (IEC Compliant)	
Driver failure rate at 5000 h	0.01 %
Median useful life L70B50	65,000 h
Median useful life L80B50	45,000 h
Median useful life L90B50	25,000 h
Application Conditions	
Maximum dim level	Not applicable
Suitable for random switching	No
Product Data	
Order product name	BY560P LED105/NW PSU HRO CAU
Full product name	BY560P LED105/NW PSU HRO CAU
Full product code	871016333678700
Local code description	GUHB2L105NWFHRO
Order code	911401505351
Material Nr. (12NC)	911401505351
Local order code	GUHB2L105NWFHRO
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8710163336787
Numerator - Packs per outer box	2
EAN/UPC - Case	8710163336787

Dimensional drawing

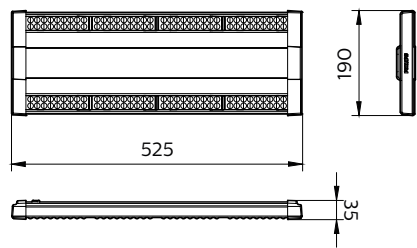

GreenUp Highbay G2

