



GreenSpace

DN471B LED20S/830 PSED-E C ELP3 WH P

LED Module, system flux 2000 lm - 830 warm white - Power supply unit with DALI interface, DC-compatible, external - High-gloss mirror - Emergency lighting 3 hours duration - Feed-through connector 5-pole - Finger-protected - White

Customers want to strike the ideal balance between their initial investment and the cost of the installation during its lifetime. GreenSpace is a cost-efficient and sustainable downlight that can be used to replace conventional CFL downlights in general lighting applications. It features the latest LED technology, which enables extremely low power consumption, while delivering consistent light output, stable color performance and high color rendering. The product's long lifetime makes it a true 'fit and forget' solution.

Product data

General Information		Emergency lighting	Emergency lighting 3 hours duration
Number of light sources	1 pc	Control interface	DALI
Lamp family code	LED20S [LED Module, system flux 2000 lm]	Connection	Feed-through connector 5-pole
Beam angle of light source	- °	Cable	-
Light source color	830 warm white	Protection class IEC	Safety class II
Cap-Base	- [-]	Glow-wire test	Temperature 750 °C, duration 5 s
Light source replaceable	No	Flammability mark	-
Number of gear units	1 unit	CE mark	CE mark
Gear	-	ENEC mark	ENEC mark
Driver/power unit/transformer	Power supply unit with DALI interface, DC-compatible, external	Warranty period	5 years
Driver included	Yes	Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen
Optic type	High-gloss mirror		
Luminaire light beam spread	120°		

	maintenance between B50 and for example B10. Therefore the median useful life (B50) value also represents the B10 value.
Constant light output	No
Number of products on MCB of 16 A type B	24
RoHS mark	RoHS mark
Unified glare rating CEN	19

Light Technical

Optical cover/lens type accessory	-
-----------------------------------	---

Operating and Electrical

Input Voltage	220-240 V
Input Frequency	50 to 60 Hz
Control signal voltage	0-16 V DC DALI
Initial CLO power consumption	- W
Average CLO power consumption	- W
Inrush current	20.4 A
Inrush time	0.195 ms
Power Factor (Min)	0.9

Controls and Dimming

Dimmable	Yes
----------	-----

Mechanical and Housing

Housing Material	Polycarbonate
Reflector material	Polycarbonate aluminum coated
Optic material	Polycarbonate
Optical cover/lens material	-
Fixation material	-
Optical cover/lens finish	-
Overall height	94 mm
Overall diameter	216 mm
Color	White

Approval and Application

Ingress protection code	IP20 [Finger-protected]
-------------------------	--------------------------

Mech. impact protection code	IK02 [0.2 J standard]
------------------------------	------------------------

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	2025 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	120 lm/W
Init. Corr. Color Temperature	3000 K
Init. Color Rendering Index	>80
Initial chromaticity	(0.43, 0.40) SDCM<3.5
Initial input power	16.8 W
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)


Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* 50000 h	L80

Application Conditions


Ambient temperature range	+10 to +40 °C
Performance ambient temperature Tq	25 °C
Suitable for random switching	Yes (relates to presence/ movement detection)

Product Data

Full product code	871869979357900
Order product name	DN471B LED20S/830 PSED-E C ELP3 WH P
EAN/UPC - Product	8718699793579
Order code	912500100552
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	912500100552
Net Weight (Piece)	1.500 kg




Dimensional drawing

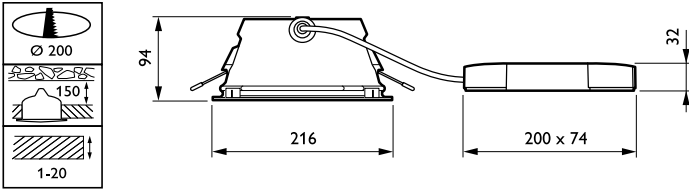


GreenSpace gen2 DN460B-DN473B

Photometric data

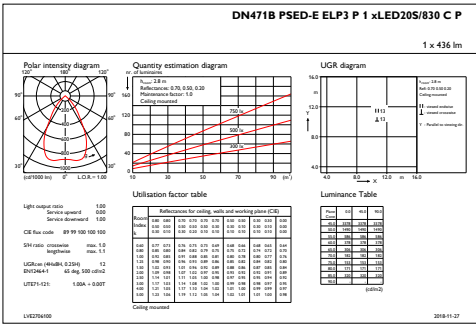

IFGU1_DN471BPSED-EELP3P1xLED20S830CP

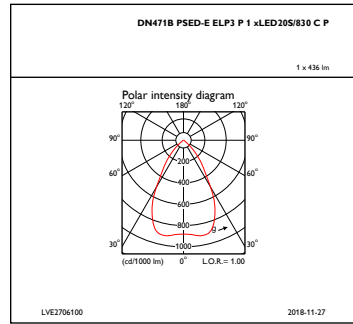

IFPC1_DN471BPSED-EELP3P1xLED20S830CP

