

# HF-Selectalume II for TL5 lamps

## HF-S 154 TL5 II 220-240V 50/60Hz

HF-Selectalume II TL5 is the most cost-effective, reliable and outstanding solution for fluorescent lamps. These ballasts are part of an overall high-efficiency lighting system that may help you or your customers to achieve any international or local energy code you need to comply with. HF-Selectalume II TL5 ballasts are the ideal choice for a broad range of new construction and retrofit applications within the commercial sector, including general surface mounting or office lighting, parking garages, warehouses, waterproof and other applications.

### Product data

General Information		Ballast factor (nom.)	
Application code	II		1.02
Type version	mk1	Power losses (nom.)	4.7 W
Lamp type	TL5	Inrush current peak (max.)	20 A
Number of lamps	1 piece/unit	<b>Wiring</b>	
Automatic restart	Yes	Connector type input terminals	WAGO 744 connector
<b>Operating and Electrical</b>		Cable capacity output wires mutual (max.)	200 pF
Input voltage	220 to 240 V	Connector type output terminals	WAGO 744 connector [ Suitable for manual wiring]
Input frequency	50 to 60 Hz	Cable length hot-wiring	0.75 m
Operating frequency (nom.)	40-60 kHz	Wire strip length	8.0-9.0 mm
Crest factor (nom.)	1.7	Dual fixture master/slave	Possible, lamp wires 2m max. length [ Master/Slave operation possible]
Power factor 100% load (nom.)	0.98	Input terminal cross section	0.50-1.50 mm <sup>2</sup>
Preheat time	1.6 s	Output terminal cross section	0.50-1.50 mm <sup>2</sup>
Mains voltage performance (AC)	202-254V-8%-+6%	Cable capacity cold output wires – earth (max.)	200 pF
Mains voltage safety (AC)	198-264V-10%-+10%		
Earth leakage current (max.)	0.5 mA		
Inrush current width	0.25 ms		

## HF-Selectalume II for TL5 lamps

Cable capacity hot output wires – earth (max.)	200 pF
--	--------

### System characteristics

Rated ballast-lamp power	54 W
Rated lamp power on TL5	54 W
System power on TL5	58.7 W
Lamp power on TL5	54 W
Power loss on TL5	4.7 W

### Temperature

T ambient (max.)	50 °C
T ambient (min.)	-15 °C
T storage (max.)	80 °C
T storage (min.)	-40 °C
T case lifetime (nom.)	75 °C
T-Case maximum (max.)	75 °C

### Mechanical and Housing

Housing	L 280x30x21
---------	-------------

### Emergency Operation

Nominal light output after 60 seconds	100% of EBLF
Normal operating voltage (DC)	220–240 V
Battery voltage guaranteed operation	176–275 V
Battery voltage guaranteed ignition	186–275 V
Emergency ballast lumen factor (EBLF) (nom.)	100 %

Nominal light output after 5 seconds	50% of EBLF
--------------------------------------	-------------



### Approval and Application

Energy efficiency index	A2 BAT
IP classification	IP 20 [ Ingress Protection 20]
EMI 9 kHz... 30 MHz	EN55015
Vibration standard	IEC68-2-6 F c
Bumps standard	IEC 68-2-29 Eb (10G/16ms)
Approval marks	F-Marking CE marking ENEC certificate CCC certificate C-Tick certificate PSB certification TISI marking SIRIM approval CB Certificate CCC certificate VDE-EMV certificate
Humming and noise level	< 30 dB(A)

### Product Data

Full product code	872790090561800
Order product name	HF-S 154 TL5 II 220–240V 50/60Hz
EAN/UPC – product	8711500999375
Order code	90561800
Numerator – quantity per pack	1
Numerator – packs per outer box	12
Material no. (12NC)	913713033666
Net weight (piece)	0.185 kg

## Dimensional drawing

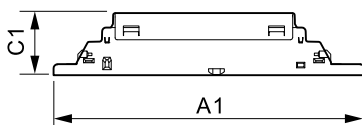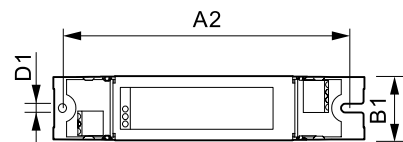

HF-S 154 TL5 II 220–240V 50/60Hz

Product	D1	C1	A1	A2	B1
HF-S 154 TL5 II 220–240V 50/60Hz	4.1 mm	28.0 mm	280 mm	265 mm	30.0 mm

## HF-Selectalume II for TL5 lamps

