



# **MASTER PL-C 2 Pin**

## MASTER PL-C 13W/830/2P 1CT/5X10BOX

Energy-saving compact fluorescent lamps. Compact long-arc low-pressure mercury discharge lamp. Envelope consists of 4 parallel narrow fluorescent tubes

#### **Warnings and Safety**

- $\boldsymbol{\cdot}$  Use only with electromagnetic control gear
- · Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- · Dimming is not possible
- · Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

General Information				
Cap-Base	G24d-1			
Life to 50% Failures (Nom)	10,000 hour(s)			
Light Technical				
Color Code	830 [CCT of 3000K]			
Luminous Flux	925 lm			
Color Designation	Warm White (WW)			
Correlated Color Temperature (Nom)	3000 K			
Luminous Efficacy (rated) (Nom)	69 lm/W			

Color rendering index (CRI)	82	
Operating and Electrical		
Power Consumption	13.4 W	
Lamp Current (Nom)	0.170 A	
Controls and Dimming		
Dimmable	No	


Datasheet, 2023, April 15 data subject to change

## **MASTER PL-C 2 Pin**

Approval and Application				
Mercury (Hg) Content (Nom)	1.4 mg			
Energy Consumption kWh/1000 h	17 kWh			
Product Data				
Order product name	MASTER PL-C 13W/830/2P 1CT/5X10BOX			
Full product name	MASTER PL-C 13W/830/2P 1CT/5X10BOX			
Full product code	871150026922500			


Order code	927904883001			
Material Nr. (12NC)	927904883001			
Numerator - Quantity Per Pack	1			
EAN/UPC - Product/Case	8711500269225			
Numerator - Packs per outer box	50			
EAN/UPC - Case	8711500269164			

## Dimensional drawing



Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-C 13W/830/2P 1CT/	27.1 mm	27.1 mm	97.5 mm	117.0 mm	139.4 mm
5X10BOX					


#### Photometric data

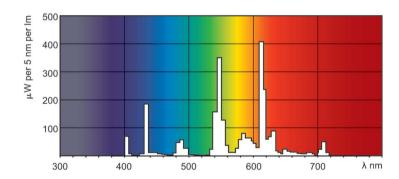


Spectral Power Distribution Colour - MASTER PL-C 13W/830/2P 1CT/5X10BOX

#### **MASTER PL-C 2 Pin**

#### Lifetime

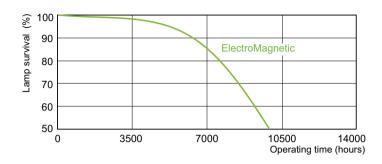



Life Expectancy Diagram - MASTER PL-C 13W/830/2P 1CT/5X10BOX

Lumen Maintenance Diagram - MASTER PL-C 13W/830/2P 1CT/5X10BOX

Life Expectancy Diagram - MASTER PL-C 13W/830/2P 1CT/5X10BOX



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.