



MASTER TL5 High Efficiency Eco



MASTER TL5 HE Eco 25=28W/830 UNP/40

This extremely efficient TL5 lamp (tube diameter 16 mm) saves considerable energy by simple lamp-for-lamp replacement. The TL5 HE Eco lamp offers excellent lumen maintenance and color rendering. Application areas vary from offices and industry to schools and retail environments.

Warnings and Safety

- A reduction in energy consumption is only achieved with current-controlled gear.
- The lamps operate perfectly with power-controlled gear, but in that case the light output can be up to 10% higher.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap-Base	G5
Features	na [Not Applicable]
Flux measurement reference	Sphere

Light Technical	
Color Code	830 [CCT of 3000K]
Luminous Flux	2,520 lm
Color Designation	Warm White (WW)
Chromaticity Coordinate X (Nom)	0.44
Chromaticity Coordinate Y (Nom)	0.403
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	103 lm/W

Color rendering index (CRI)	82
-----------------------------	----

Operating and Electrical	
Power Consumption	25.4 W
Lamp Current (Nom)	0.170 A

Controls and Dimming	
Dimmable	Yes

Mechanical and Housing	
Bulb Shape	T5

Approval and Application	
Energy Efficiency Class	F

MASTER TL5 High Efficiency Eco


Mercury (Hg) Content (Nom)	1.2 mg
Energy Consumption kWh/1000 h	26 kWh
EPREL Registration Number	423467

Product Data

Order product name	MASTER TL5 HE Eco 25=28W/830 UNP/40
Full product name	MASTER TL5 HE Eco 25=28W/830 UNP/40
Full product code	872790082588600


Order code	82588600
Material Nr. (12NC)	927990983031
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500880000
Numerator - Packs per outer box	40
EAN/UPC - Case	8727900825886

Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HE Eco 25=28W/830 UNP/40	17 mm	1,149.0 mm	1,156.1 mm	1,153.7 mm	1,163.2 mm



Photometric data

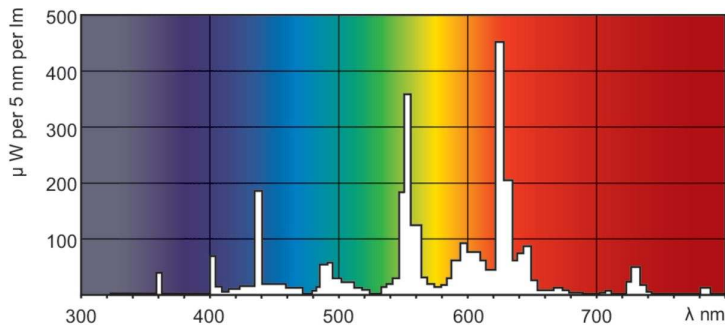

Spectral Power Distribution Colour - MASTER TL5 HE Eco 25=28W/830 UNP/40


MASTER TL5 High Efficiency Eco

Lifetime

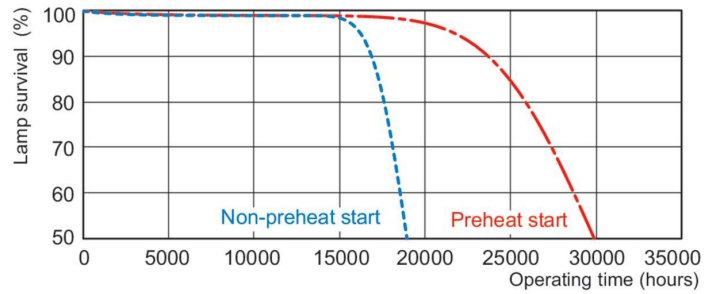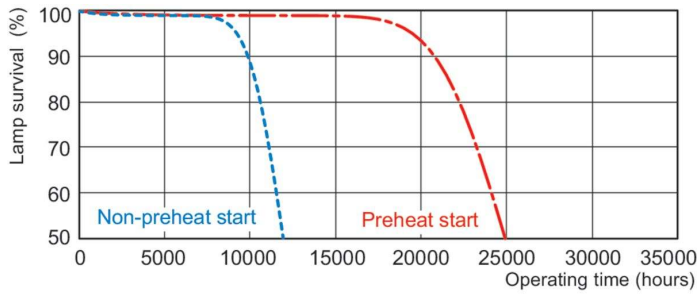

Life Expectancy Diagram - MASTER TL5 HE Eco 25=28W/830 UNP/40

Life Expectancy Diagram - MASTER TL5 HE Eco 25=28W/830 UNP/40

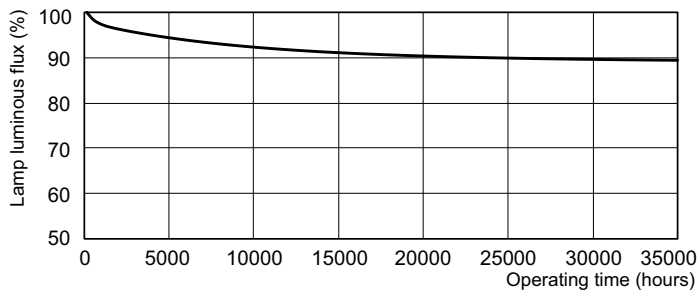

Lumen Maintenance Diagram - MASTER TL5 HE Eco 25=28W/830 UNP/40

