

# PHILIPS

## Lighting



# Actinic BL TL(-K)/TL-D(-K)

## ACTINIC BL30W/10 25PK

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

### Product data


General Information		Voltage (Nom)	
Base	G13 [ Medium Bi-Pin Fluorescent]	45 V	
Main Application	Insect traps	Approval and Application	
Life to 50% Failures (Nom)	2000 h	Mercury (Hg) Content (Nom)	8.0 mg
Useful Life (Nom)	2000 h	UV	
Light Technical		UV-B/UV-A (IEC)	02 %
Color Code	10	UV-A Radiation 100Hr (IEC)	6.6 W
Color Designation	Actinic	Product Data	
Chromaticity Coordinate X (Nom)	225	Order product name	ACTINIC BL TL-DK - 30W/10 1SL
Chromaticity Coordinate Y (Nom)	230	EAN/UPC - Product	8711500893468
UV Depreciation at 500 h	15 %	Order code	215178
UV Depreciation at 1000 h	25 %	Numerator - Quantity Per Pack	1
UV Depreciation at 2000 h	40 %	Numerator - Packs per outer box	25
Operating and Electrical		Material Nr. (12NC)	928019501029
Power (Rated) (Nom)	30 W	Net Weight (Piece)	59.600 g
Lamp Current (Nom)	0.805 A		

# Actinic BL TL(-K)/TL-D(-K)

## Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Lamp contains mercury. Manage in Accord with Disposal Laws. See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-800-555-0050


## Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
ACTINIC BL TL-DK - 30W/10 1SL	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm

TL-DK 30W/10

## Photometric data

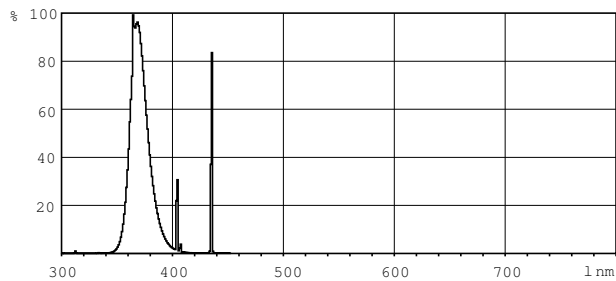

Lightcolor /10

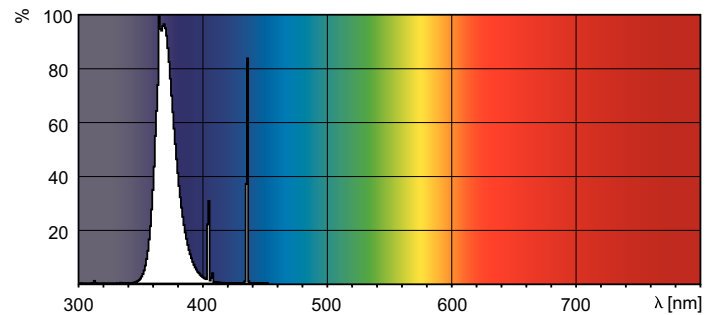

Lightcolor /10

