



# TL-E LIFEMAX

## Standard Colours

### TL-E 22W/54-765 1CT/20

This circular TL lamp (tube diameter 29 mm) enables omni-directional light distribution. It is suitable for use in a wide range of luminaires for various purposes where color rendering is not important.


#### Product data

General Information	
Cap-Base	G10Q [ G10q]
Life to 50% Failures (Nom)	13000 h
Light Technical	
Color Code	54-765
Luminous Flux (Nom)	1050 lm
Color Designation	Cool Daylight
Lumen Maintenance 10000 h (Nom)	73 %
Lumen Maintenance 2000 h (Nom)	80 %
Lumen Maintenance 5000 h (Nom)	71 %
Correlated Color Temperature (Nom)	6200 K
Luminous Efficacy (rated) (Nom)	48 lm/W
Color Rendering Index (Nom)	72
Operating and Electrical	
Power (Nom)	22.0 W
Lamp Current (Nom)	0.400 A
Voltage (Nom)	62 V
Controls and Dimming	
Dimmable	Yes

Mechanical and Housing	
Bulb Shape	C-T9 [ C-T9 29 mm]
Approval and Application	
Mercury (Hg) Content (Nom)	9 mg
Product Data	
Full product code	871150063390300
Order product name	TL-E 22W/54-765 1CT/20
EAN/UPC - Product	8711500633903
Order code	928026205436
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	20
Material Nr. (12NC)	928026205436
Net Weight (Piece)	0.110 kg
ILCOS Code	FSC-22/62/2A-E-G10q-29/210

# TL-E LIFEMAX Standard Colours


## Dimensional drawing

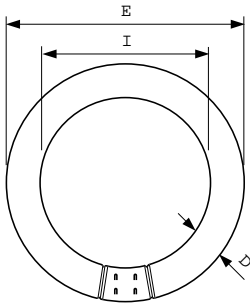


Product	D (max)	D (min)	E (min)	E (max)	I (min)	I (max)
TL-E 22W/54-765	30.9 mm	26.2 mm	205.0 mm	213.5 mm	149.1 mm	155.6 mm
1CT/20						

TL-E 22W/54-765

## Photometric data

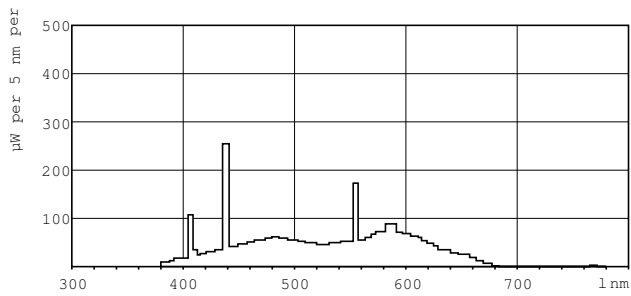

LDPB\_TL-ESTD\_54-765-Spectral power distribution B/W

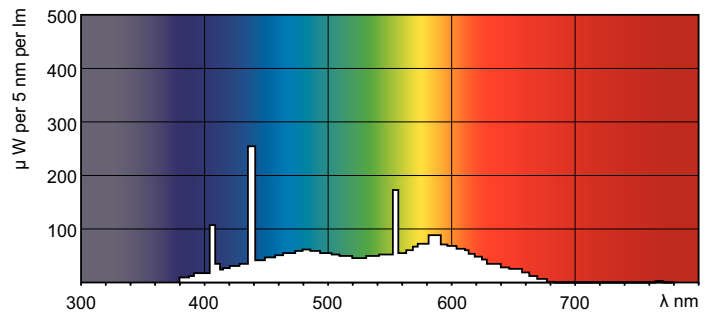

LDPO\_TL-ESTD\_54-765-Spectral power distribution Colour

