

MASTERColour CDM-T Evolution

MC CDM-T Evolution 35W/930 G12

Single-ended, highest-efficiency, longest-life Ceramic Metal Halide discharge lamp producing crisp white sparkling light with high color rendering

Warnings and Safety

- · Use only in a totally enclosed luminaire, even during testing (IEC61167, IEC62035, IEC60598)
- \cdot The luminaire must be able to contain hot lamp parts if the lamp ruptures
- \cdot Use only with electronic control gear
- The vast majority of drivers are fully compatible with CDM Evolution lamps. However, best performance is guaranteed with Philips drivers.
- · Control gear must include end-of-life protection (IEC61167, IEC 62035)
- \cdot CDM Evolution lamps are designed to comply with IEC standards
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information					
Cap-Base	G12 [G12]				
Operating Position	UNIVERSAL [Any or Universal (U)]				
Life to 50% Failures (Nom)	25,000 hour(s)				
Light Technical					
Color Code	930 [CCT of 3000K]				
Color Designation	Warm White (WW)				
Chromaticity Coordinate X (Nom)	0.427				
Chromaticity Coordinate Y (Nom)	0.388				
Correlated Color Temperature (Nom)	3000 K				

Luminous Efficacy (rated) (Nom)	110 lm/W
Color rendering index (CRI)	90
Arc Length O (Nom)	5.5 mm
Operating and Electrical	
Power Consumption	39.0 W
Voltage (Nom)	97 V
Voltage (Nom)	97 V

Datasheet, 2023, September 4 data subject to change

MASTERColour CDM-T Evolution


Controls and Dimming					
Dimmable	No				
Mechanical and Housing					
Bulb Finish	Clear				
Bulb Shape	T19 [T 19mm]				
Approval and Application					
Mercury (Hg) Content (Nom)	3.8 mg				
Energy Consumption kWh/1000 h	43 kWh				
Product Data					
Order product name	MC CDM-T Evolution 35W/930 G12				

Full product name	MC CDM-T Evolution 35W/930 G12				
Full product code	871829165121500				
Order code	928064305131				
Material Nr. (12NC)	928064305131				
Numerator - Quantity Per Pack	1				
EAN/UPC - Product/Case	8718291651215				
Numerator - Packs per outer box	12				
EAN/UPC - Case	8718291651222				

Dimensional drawing

Product	D (max)	0	L (min)	L (max)	L	C (max)
MC CDM-T Evolution 35W/930	20 mm	5.5 mm	55 mm	57 mm	56 mm	103 mm
G12						

Photometric data





Light Distribution Diagram - MC CDM-T Evolution 35W/930 G12

Spectral Power Distribution Colour - MC CDM-T Evolution 35W/930 G12

MASTERColour CDM-T Evolution

Lifetime

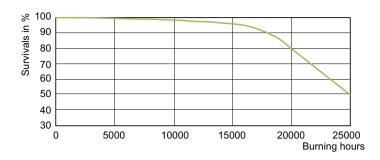

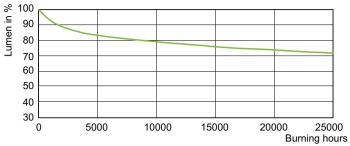

Life Expectancy Diagram - MC CDM-T Evolution 35W/930 G12

Lumen Maintenance Diagram - MC CDM-T Evolution 35W/930 G12



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.