



MASTERColour CDM MW Eco



MASTERColour CDM-T MW eco 230W/842 E40

Ceramic metal halide lamps with clear tubular or coated ellipsoid outer bulb, tailor-made to replace and outperform quartz metal halide lamps on existing gear.

Warnings and Safety

- For use with control gear designed for high pressure mercury or high-pressure sodium lamps with external ignitor
- A lamp breaking is extremely unlikely to have an impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Warm restart time can be up to 15 minutes; T15 ignitors therefore advised.

Product data

General Information	
Cap-Base	E40
Operating Position	UNIVERSAL [Any or Universal (U)]
Flux measurement reference	Sphere
Life to 50% Failures (Nom)	30,000 hour(s)
Light Technical	
Color Code	842 [CCT of 4200K]
Luminous Flux	21,400 lm
Color Designation	Cool White (CW)
Chromaticity Coordinate X (Nom)	0.371
Chromaticity Coordinate Y (Nom)	0.366
Correlated Color Temperature (Nom)	4200 K
Luminous Efficacy (rated) (Nom)	94 lm/W
Color rendering index (CRI)	88


Arc Length O (Nom)	12.4 mm
Operating and Electrical	
Power Consumption	227.0 W
Voltage (Nom)	127 V
Voltage (Nom)	127 V
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear
Bulb Material	Hard Glass
Bulb Shape	T46

MASTERColour CDM MW Eco

Approval and Application	
Energy Efficiency Class	F
Mercury (Hg) Content (Max)	32 mg
Mercury (Hg) Content (Nom)	32.0 mg
Energy Consumption kWh/1000 h	227 kWh
EPREL Registration Number	473314
Product Data	
Order product name	MASTERColour CDM-T MW eco 230W/842 E40
Full product name	MASTERColour CDM-T MW eco 230W/842 E40


Full product code	871869659681400
Order code	928070119230
Material Nr. (12NC)	928070119230
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696596814
Numerator - Packs per outer box	12
EAN/UPC - Case	8718696596821

Dimensional drawing




Product	D (max)	O	L	C (max)
MASTERColour CDM-T MW eco 230W/842 E40	47 mm	12.4 mm	157 mm	257 mm

Photometric data




Light Distribution Diagram - MASTERColour CDM-T MW eco 230W/842 E40

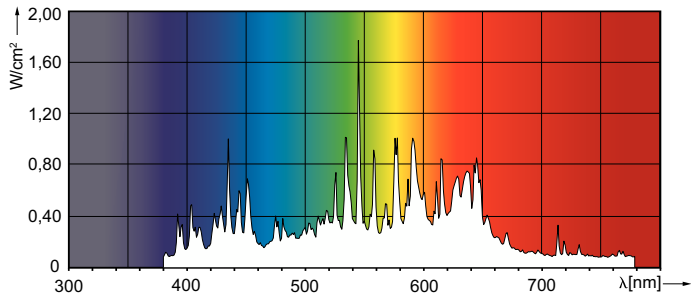


Spectral Power Distribution Colour - MASTERColour CDM-T MW eco 230W/842 E40

MASTERColour CDM MW Eco

Lifetime

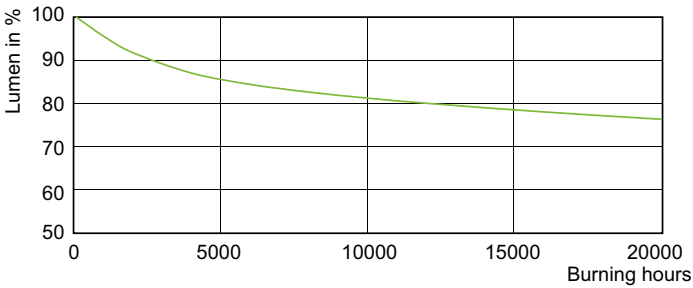

Lumen Maintenance Diagram - MASTERColour CDM-T MW eco 230W/842 E40

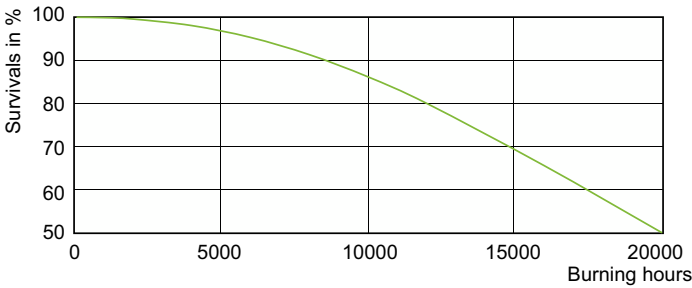

Life Expectancy Diagram - MASTERColour CDM-T MW eco 230W/842 E40

