



HPI-T High Wattage

HPI-T 2000W/542 E40 380V 1SL/4

Quartz metal halide lamps with clear outer bulb

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- For use with control gear designed for high-pressure mercury lamps
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap-Base	E40
Operating Position	P20 [Parallel +/-20D or Horizontal(HOR)]
Life to 50% Failures (Nom)	12,000 hour(s)

Light Technical	
Color Code	542 [CCT of 4200K]
Color Designation	Cool White (CW)
Chromaticity Coordinate X (Nom)	387
Chromaticity Coordinate Y (Nom)	403
Correlated Color Temperature (Nom)	3800 K
Luminous Efficacy (rated) (Nom)	101 lm/W
Color rendering index (CRI)	59
Arc Length O (Nom)	120 mm

Operating and Electrical	
Power Consumption	1,980 W
Voltage (Nom)	232 V

Voltage (Nom)	232 V
---------------	-------

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	T100

Approval and Application	
Mercury (Hg) Content (Nom)	256 mg
Energy Consumption kWh/1000 h	2178 kWh


Product Data	
Order product name	HPI-T 2000W/542 E40 380V 1SL/4
Full product name	HPI-T 2000W/542 E40 380V 1SL/4
Full product code	871150020235245
Order code	928074209228

HPI-T High Wattage

Material Nr. (12NC)	928074209228
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500202352
Numerator - Packs per outer box	4


EAN/UPC - Case	8711500202369
----------------	---------------

Dimensional drawing




Product	D (max)	O	L	C (max)
HPI-T 2000W/542 E40 380V 1SL/4	101.5 mm	120 mm	267 mm	430 mm

Photometric data

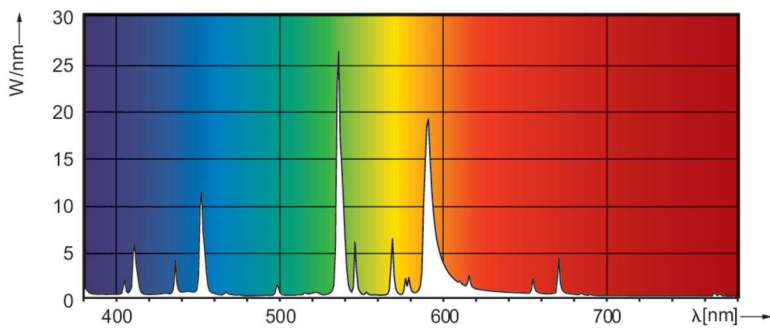


Spectral Power Distribution Colour - HPI-T 2000W/542 E40 380V 1SL/4

Lifetime

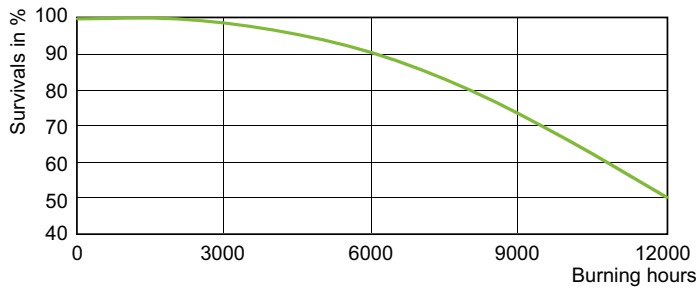

Life Expectancy Diagram - HPI-T 2000W/542 E40 380V 1SL/4

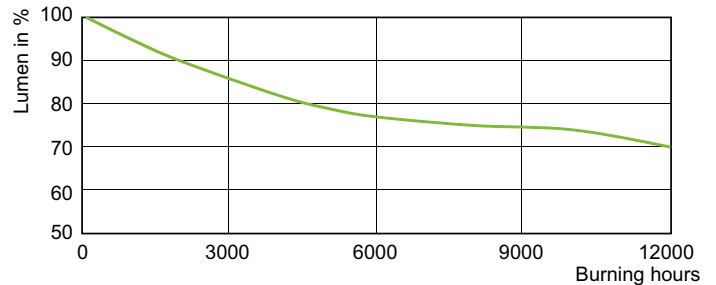

Lumen Maintenance Diagram - HPI-T 2000W/542 E40 380V 1SL/4

HPI-T High Wattage

