



# CDM-SA/T

## CDM-SA/T 150W/942 1CT/12

CDM-SA/T – the greener way to light up the night With a high luminous efficacy producing more lumens per watt than standard Architainment lamps, the CDM-SA/T is the greener alternative to light up the night. In addition, the optimal lamp filling and short arc of the lamp create a high beam intensity and excellent colour rendering.

#### Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

General Information					
Cap-Base	G12 [G12]				
Operating Position	UNIVERSAL [Any or Universal (U)] Sphere				
Flux measurement reference					
Life to 50% Failures (Nom)	9,000 h				
Light Technical					
Color Code	942 [CCT of 4200K]				
Luminous Flux	13,000 lm				
Color Designation	Cool White (CW)				
Chromaticity Coordinate X (Nom)	0.371				
Chromaticity Coordinate Y (Nom)	0.366				
Correlated Color Temperature (Nom)	4200 K				
Luminous Efficacy (rated) (Nom)	84 lm/W				
Color rendering index (CRI)	95				
Arc Length O (Nom)	6 mm				


Operating and Electrical						
Power Consumption	155.0 W					
Lamp Current (Nom)	1.8 A					
Controls and Dimming						
Dimmable	No					
Approval and Application						
Energy Efficiency Class	G					
Mercury (Hg) Content (Max)	11.9 mg					
Energy Consumption kWh/1000 h	155 kWh					
EPREL Registration Number	897559					
Product Data						
Order product name	CDM-SA/T 150W/942 1CT/12					
Full product name	CDM-SA/T 150W/942 1CT/12					
Full product code	871150020094515					

### CDM-SA/T

Order code	928086605103
Material Nr. (12NC)	928086605103
Local order code	CDMSAT150W942
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500200945


Numerator - Packs per outer box	12
EAN/UPC - Case	8711500200952

#### Dimensional drawing



Product	D (max)	0	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
CDM-SA/T	20 mm	6	55 mm	57 mm	56	110 mm	31 mm	30	29 mm
150W/942		mm			mm			mm	
1CT/12									

#### Photometric data

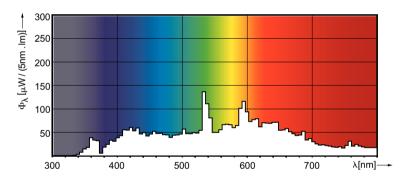

Spectral Power Distribution Colour - CDM-SA/T 150W/942 1CT/12



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.