



MASTER CosmoWhite CPO-TW & CPO-TW Xtra

MASTER CosmoWhite CPO-TW Xtra 60W/728 PGZ12

New-generation ceramic metal halide lamps used in Outdoor offering efficient and pleasant white light

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information			
Cap-Base	PGZ12	Chromaticity Coordinate X (Nom)	0.447
Operating Position	UNIVERSAL [Any or Universal (U)]	Chromaticity Coordinate Y (Nom)	0.4
Flux measurement reference	Sphere	Correlated Color Temperature (Nom)	2800 K
Life to 50% Failures (Nom)	32,000 hour(s)	Luminous Efficacy (rated) (Nom)	120 lm/W
		Color rendering index (CRI)	73
		Arc Length O (Nom)	14 mm
Light Technical		Operating and Electrical	
Color Code	728 [CCT of 2800K]	Power Consumption	60.0 W
Luminous Flux	7,200 lm	Voltage (Nom)	92 V
Color Designation	White (WH)		

MASTER CosmoWhite CPO-TW & CPO-TW Xtra

Voltage (Nom)	92 V
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	T19
Approval and Application	
Energy Efficiency Class	E
Mercury (Hg) Content (Max)	2 mg
Mercury (Hg) Content (Nom)	2.0 mg
Energy Consumption kWh/1000 h	60 kWh
EPREL Registration Number	473348


Product Data	
Order product name	MST CosmoWh CPO-TW Xtra 60W/728 PGZ12
Full product name	MASTER CosmoWhite CPO-TW Xtra 60W/728 PGZ12
Full product code	871150020851415
Order code	20851415
Material Nr. (12NC)	928088505127
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500208514
Numerator - Packs per outer box	12
EAN/UPC - Case	8711500208521

Dimensional drawing




Product	D (max)	D	O	L	C (max)
MST CosmoWh CPO-TW Xtra 60W/728 PGZ12	20 mm	19 mm	14 mm	59 mm	132 mm

Photometric data

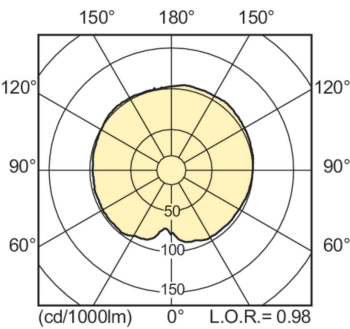


Light Distribution Diagram - MST CosmoWh CPO-TW Xtra 60W/728 PGZ12

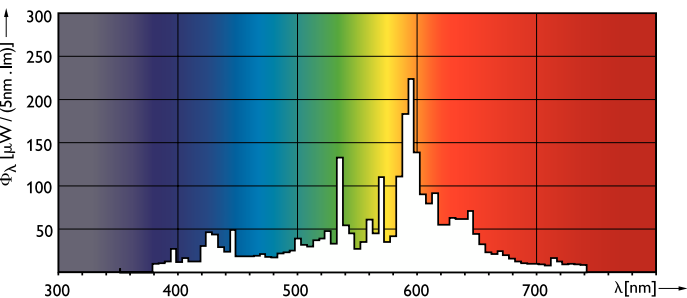


Spectral Power Distribution Colour - MST CosmoWh CPO-TW Xtra 60W/728 PGZ12

MASTER CosmoWhite CPO-TW & CPO-TW Xtra

Lifetime

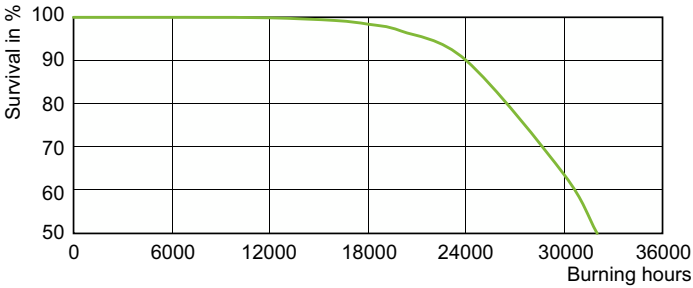

Life Expectancy Diagram - MST CosmoWh CPO-TW Xtra 60W/728 PGZ12

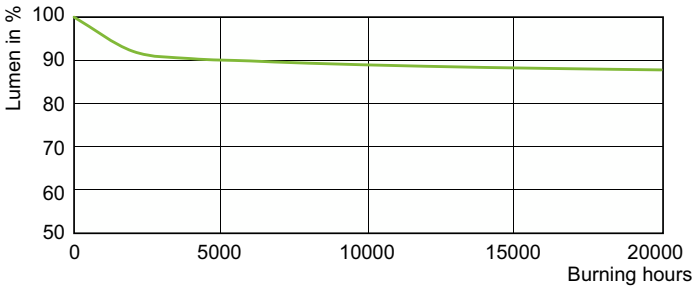

Lumen Maintenance Diagram - MST CosmoWh CPO-TW Xtra 60W/728 PGZ12

