



MASTER CosmoWhite CPO-TW & CPO-TW Xtra

MST CosmoWh CPO-TW 60W/840 PGZ12 1CT

New-generation ceramic metal halide lamps used in Outdoor offering efficient and pleasant white light

Warnings and Safety

- · Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- \cdot Use only with electronic control gear
- · Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap-Base	PGZ12
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 50% Failures (Nom)	22,000 hour(s)
Light Technical	
Color Code	840 [CCT of 4000K]
Color Designation	White (WH)
Chromaticity Coordinate X (Nom)	382
Chromaticity Coordinate Y (Nom)	392
Luminous Efficacy (rated) (Nom)	117 lm/W

Color rendering index (CRI)	83
Arc Length O (Nom)	14 mm
Operating and Electrical	
Power Consumption	60.0 W
Voltage (Nom)	92 V
Voltage (Nom)	92 V
Controls and Dimming	
Dimmable	Yes


Datasheet, 2024, February 7 data subject to change

MASTER CosmoWhite CPO-TW & CPO-TW Xtra

Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	T19
Approval and Application	
Mercury (Hg) Content (Nom)	1.54 mg
Energy Consumption kWh/1000 h	66 kWh
Product Data	
Order product name	MST CosmoWh CPO-TW 60W/840 PGZ12 1CT


Full product name	MST CosmoWh CPO-TW 60W/840 PGZ12 1CT
Full product code	871829113793100
Order code	928095005127
Material Nr. (12NC)	928095005127
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718291137931
Numerator - Packs per outer box	12
EAN/UPC - Case	8718291137948

Dimensional drawing




Product	D (max)	D	0	L	C (max)
MST CosmoWh CPO-TW 60W/840 PGZ12	20 mm	19 mm	14 mm	59 mm	132 mm
1CT					

Photometric data




Light Distribution Diagram - MST CosmoWh CPO-TW 60W/840 PGZ12 1CT

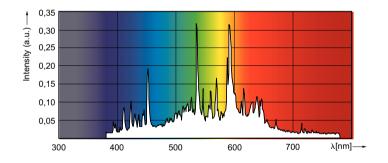


Spectral Power Distribution Colour - MST CosmoWh CPO-TW 60W/840 PGZ12 1CT

MASTER CosmoWhite CPO-TW & CPO-TW Xtra

Lifetime

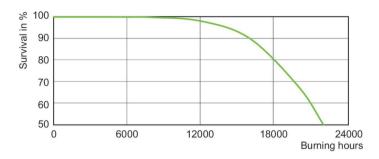

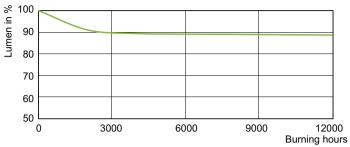

Life Expectancy Diagram - MST CosmoWh CPO-TW 60W/840 PGZ12 1CT

Lumen Maintenance Diagram - MST CosmoWh CPO-TW 60W/840 PGZ12 1CT



© 2024 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.