



LED PAR30 S/L

12PAR30S/F25 3000 DIM AF SO 6/1

Philips LED spots with a single optic beam, provide a clean beam that's free from shadows with beam angles from 15 and 40 degrees to suit every general lighting application.

Product data

General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal lifetime	25,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	25 degree(s)
Luminous Flux	900 lm
Luminous Intensity (Nom)	5,300 cd
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	75 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Line Frequency	60 Hz
Input Frequency	60 Hz
Power Consumption	12 W
Lamp Current (Nom)	121 mA


Wattage Equivalent	75 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.85
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	192.2 °F
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Shape	PAR30S [PAR 3.75 inch/95mm Short]
Approval and Application	
Suitable For Accent Lighting	Yes
Energy Certifications	Energy Star
Product Data	
Order product name	120V PAR30S 12W 25D 3000K 900 D AF SO
Full product name	12PAR30S/F25 3000 DIM AF SO 6/1
Order code	435305
Material Nr. (12NC)	929001112604

LED PAR30 S/L

Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677435301
Numerator - Packs per outer box	6


EAN/UPC - Case	50046677435306
----------------	----------------

Dimensional drawing




Product	D	C
120V PAR30S 12W 25D 3000K 900 D AF SO	92 mm	92.7 mm


Photometric data

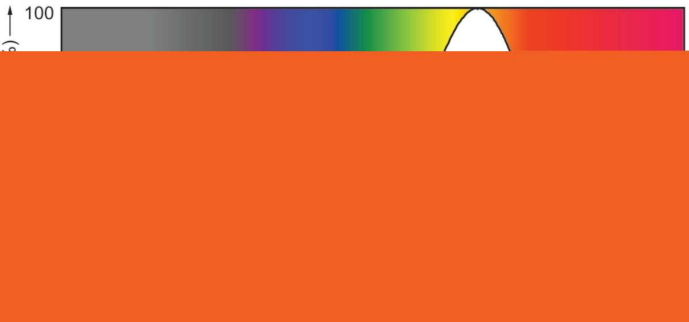

Spectral Power Distribution Colour - 120V PAR30S 12W 25D 3000K 900 D AF SO



Light Distribution Diagram - 120V PAR30S 12W 25D 3000K 900 D AF SO

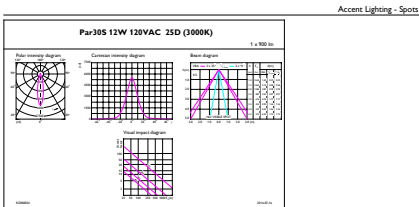

General uniform lighting - 120V PAR30S 12W 25D 3000K 900 D AF SO

LED PAR30 S/L

