



MASTER LEDspot LV AR111

MAS LEDspotLV D 15-75W 930 AR111 24D

Delivering a warm, halogen-like accent beam, MASTER LEDspot LV AR111 is an ideal retrofit solution for spot and general lighting applications in the hospitality and retail industry. It is particularly suitable for general lighting where the light is on all the time, such as creative accent lighting applications in shops, restaurants, hotels, and especially for galleries, exhibitions and museums. The robustly designed MASTER LEDspot LV AR111 offers various beam angles for a clearly defined beam spread. There is no UV or IR in the beam, making it suitable for illuminating heat-sensitive objects (food, organic materials, paintings, etc.). The patented intelligent driver enables broad compatibility with existing electromagnetic and electronic halogen transformers. MASTER LEDspot LV AR111 delivers huge energy savings and minimizes maintenance cost without any reduction in brightness.

产品数据

一般資訊	
燈座基底	G53 [G53]
標稱使用壽命	40,000 h
切換週期	50,000
照明技術	LED
符合歐盟 RoHS 標準	是

照明技術	
色碼	930 [CCT of 3000K]
光束角 (Nom)	24 °
光通量	840 lm
光強 (標稱)	4,000 cd
色彩名稱	白色 (WH)
相關色彩溫度 (規範)	3000 K

光效 (額定) (標準)	56.00 lm/W
色彩一致性	<6
演色性指數 (CRI)	90
LLMF 標稱壽命結束 (規範)	70 %
90° 錐體內的光通量 (額定)	770 lm


運轉與電力	
線路頻率	- Hz
輸入頻率	- Hz
耗電量	15 W
燈具電流 (標稱)	1,800 mA
相等瓦數	75 W
起始時間 (標稱)	0.5 s
達到 60% 光色的熱啟動時間	立即完全點亮 s

MASTER LEDspot LV AR111

功率因數 (比值)	0.7
電壓 (標稱)	12 V
溫度	
T 盒上限 (正常情況)	74 °C
控制與調光	
可調光	是
機械與外罩	
燈泡形狀	AR111
認證與應用	
適合補強燈	是



能源消耗 kWh/1000 h	17 kWh
產品資料	
下訂產品名稱	MAS LEDspotLV D 15-75W 930 AR111 24D
完整產品名稱	MAS LEDspotLV D 15-75W 930 AR111 24D
完整產品代碼	871869651518100
訂單代碼	929001170308
材質 Nr. (12NC)	929001170308
分子 - 每個包裝的數量	1
EAN/UPC - 產品/案例	8718696515181
分子 - 每一外盒包裝	6
EAN/UPC - 箱	8718696515198

二维绘图

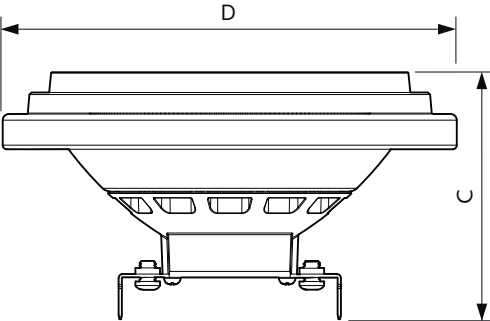

Product	D	C
MAS LEDspotLV D 15-75W 930 AR111 24D	111 mm	62 mm

光度数据

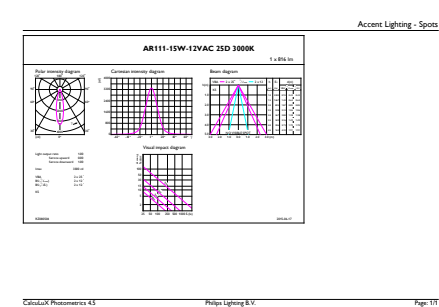

Accent Lighting Spots - MAS LEDspotLV D 15-75W 930 AR111 24D

Light Distribution Diagram - MAS LEDspotLV D 15-75W 930 AR111 24D


MASTER LEDspot LV AR111

光度数据




Spectral Power Distribution Colour - MAS LEDspotLV D 15-75W 930 AR111 24D

壽命

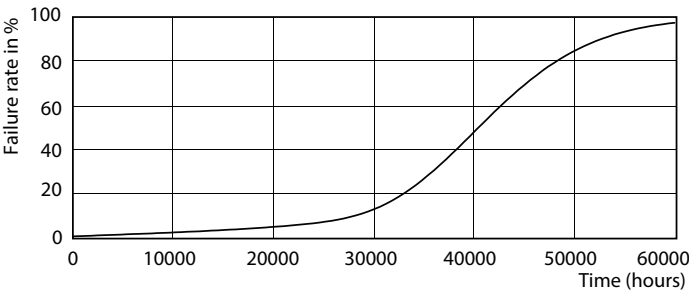

Life Expectancy Diagram - MAS LEDspotLV D 15-75W 930 AR111 24D

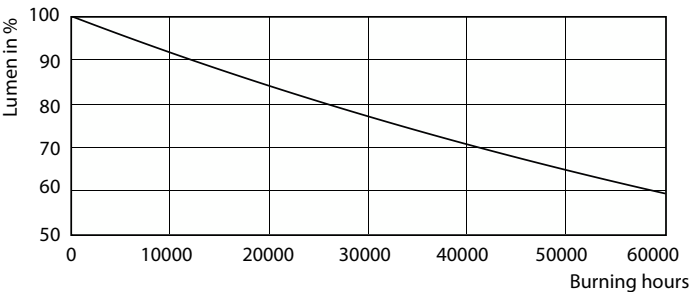

Lumen Maintenance Diagram - MAS LEDspotLV D 15-75W 930 AR111 24D

