



Standard LED bulbs

LEDBulb 9-60W E27 3000K W A19 3PK/4

Standard LED bulbs are compatible with existing fixtures with a E27 holder and are designed for retrofit replacement of incandescent, halogen and energy saving bulbs. They deliver huge energy savings and minimize maintenance costs. The Standard LED bulb is the perfect bulb for your basic lighting needs. It provides the beautiful light and performance you expect from the LED technology at an affordable price.

Product data

General Information		Starting Time (Nom)		0.5 s
Cap-Base	E27 [E27]	Warm-up time to 60% light		0.5 s
Nominal lifetime	25,000 hour(s)	Power Factor (Fraction)		0.92
Switching Cycle	50,000	Voltage (Nom)		100-240 V
Lighting Technology	LED	Temperature		
EU RoHS compliant	Yes	T-Case Maximum (Nom)		80 °C
Light Technical		Controls and Dimming		
Color Code	830 [CCT of 3000K]	Dimmable		No
Beam Angle (Nom)	150 degree(s)	Mechanical and Housing		
Luminous Flux	806 lm	Bulb Finish		Frosted
Color Designation	White (WH)	Bulb Shape		A19 [A 19mm]
Correlated Color Temperature (Nom)	3000 K	Product Data		
Luminous Efficacy (rated) (Nom)	89.56 lm/W	Order product name		LEDBulb 9-60W E27 3000K W A19 3PK/4
Color Consistency	ANSI	Full product name		LEDBulb 9-60W E27 3000K W A19 3PK/4
Color rendering index (CRI)	80	Full product code		871869665792800
LLMF At End Of Nominal Lifetime (Nom)	70 %	Order code		929001195399
Operating and Electrical		Material Nr. (12NC)		929001195399
Line Frequency	50 to 60 Hz	Numerator - Quantity Per Pack		1
Input Frequency	50 to 60 Hz			
Power Consumption	9 W			


Standard LED bulbs

EAN/UPC - Product/Case	8718696657928
Numerator - Packs per outer box	4
EAN/UPC - Case	8718696657935

Dimensional drawing

Product	D	C
LEDBulb 9-60W E27 3000K W A19 3PK/4	60 mm	110 mm

Photometric data

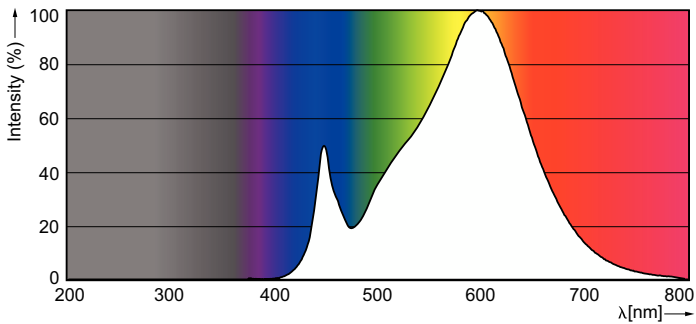

Light Distribution Diagram - LEDBulb 9-60W E27 3000K W A19 3PK/4

Spectral Power Distribution Colour - LEDBulb 9-60W E27 3000K W A19 3PK/4

