



LED PAR38

14PAR38/LED/827/F25/DIM/ULW/120V 6/1FB

Philips LED spots with a single optic beam, provide a clean beam that's free from shadows with beam angles from 15 and 40 degrees to suit every general lighting application.

Product data

General Information	
Base	E26 [Single Contact Medium Screw]
Nominal Lifetime (Nom)	25000 h
Switching Cycle	25000X
Technical Type	14-120W

Light Technical	
Color Code	827 [CCT of 2700K]
Beam Angle (Nom)	25°
Initial lumen (Nom)	1150 lm
Luminous Flux (Rated) (Nom)	1150 lm
Luminous Intensity (Nom)	5700 cd
Color Designation	Warm White (WW)
Rated Beam Angle	25°
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	82.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	14 W
Lamp Current (Nom)	120 mA

Wattage Equivalent	120 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	120 V

Temperature	
T-Case Maximum (Nom)	70 °C


Controls and Dimming	
Dimmable	Yes

Approval and Application	
Suitable For Accent Lighting	Yes

Product Data	
Order product name	14PAR38/LED/827/F25/DIM/ULW/120V 6/1FB
EAN/UPC - Product	046677529505
Order code	529503
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001318304
Net Weight (Piece)	0.385 kg

LED PAR38


Dimensional drawing




Classic PAR38 120V 14-120W 1200lm 25D 27

Product	D	C
14PAR38/LED/827/F25/DIM/ULW/120V 6/1FB	122 mm	134 mm

Photometric data




General Information 41 Photo Lighting 417 Page 117



14-120W E26 PAR38 25D 827 2700K



14-120W E26 PAR38 25D 827 2700K

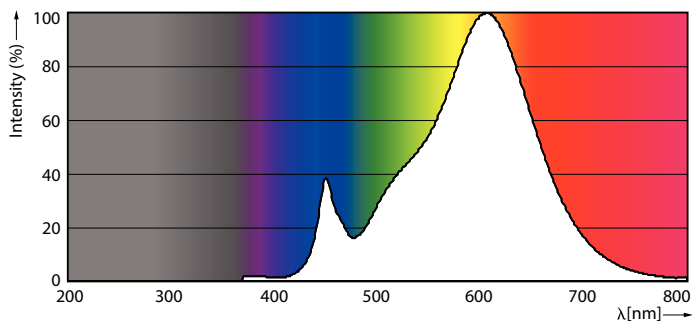

14-120W E26 PAR38

LED PAR38

Lifetime

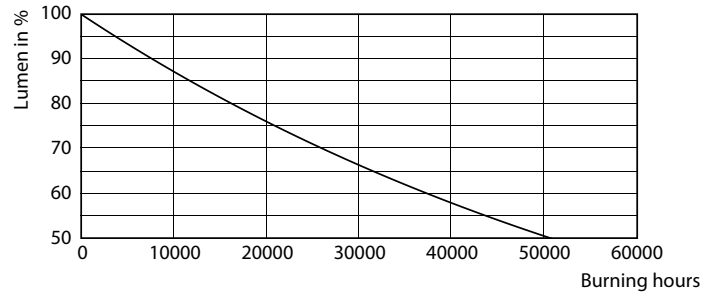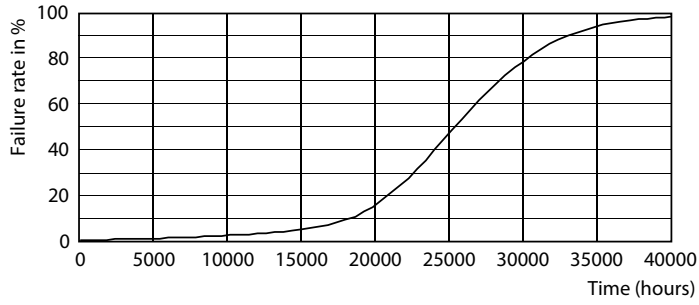

14-120W E26 PAR38

14-120W E26 PAR38

