



MASTER LEDspot ExpertColor MV

MASTER LED D 5.5-50W GU10 930 25D 10/1

MASTER LEDspot ExpertColor creates a warm and comfortable ambience for hospitality venues, homes and restaurants. They offer superior lighting that has a customized spectrum, high CRI, and deep dimming feature. What's more the innovative, trimless lens design will also suit almost any interior decor with its clean and neat look. In addition, with MASTER LEDspot ExpertColor you can take advantage of the full ExpertColor family, which also includes LEDspot MR16, LEDspot AR111 and LEDspot PAR lamps. MASTER LEDspot ExpertColor delivers huge energy savings and minimizes maintenance costs without any compromise on light quality and lifetime, enabling residential and business owners to achieve a return on their investment within a short time period.

Product data

General Information	
Cap-Base	GU10 [GU10]
Nominal lifetime	40,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Narrow Cone
CE mark	Yes
EU RoHS compliant	Yes
Light Technical	
Color Code	930 [CCT of 3000K]
Beam Angle (Nom)	25 degree(s)
Luminous Flux	375 lm
Luminous Intensity (Nom)	1,000 cd
Color Designation	White (WH)
-	

Correlated Color Temperature (Nom)	3000 K	
Luminous Efficacy (rated) (Nom)	68.00 lm/W	
Color Consistency	<3	
Color rendering index (CRI)	97	
LLMF At End Of Nominal Lifetime (Nom)	70 %	
Luminous Flux in 90° Cone (Rated)	375 lm	
Flickering value (PstLM)	1	
Stroboscopic effect value (SVM)	0.4	
Photobiological safety according to EN 62471 RG1		
Operating and Electrical		
Line Frequency	50 to 60 Hz	
3		

5 5 W

30 mA

Datasheet, 2023, August 16 data subject to change

Input Frequency
Power Consumption


Lamp Current (Nom)

MASTER LEDspot ExpertColor MV

Wattage Equivalent	50 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.8
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	176 °F
Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	PAR16 [PAR 2 inch/50mm]
Approval and Application	
Energy Efficiency Class	G
Suitable For Accent Lighting	Yes


Energy Consumption kWh/1000 h	6 kWh
EPREL Registration Number	391832
EyeComfort	Yes
Product Data	
Order product name	MAS LED ExpertColor 5.5-50W GU10 930
	25D
Full product name	MASTER LED D 5.5-50W GU10 930 25D
	10/1
Full product code	871869670763000
Order code	326371
Material Nr. (12NC)	929001347102
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696707630
Numerator - Packs per outer box	10
EAN/UPC - Case	8718696707647

Dimensional drawing




Product	D	С
MAS LED ExpertColor 5.5-50W GU10 930 25D	2 inch	2-1/8 inch

Photometric data




Accent Lighting Spots - MAS LED ExpertColor 5.5-50W GU10 930 25D

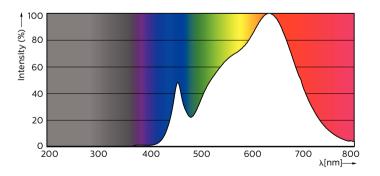

Spectral Power Distribution Colour - MAS LED ExpertColor 5.5-50W GU10 930 25D


MASTER LEDspot ExpertColor MV


Photometric data



Light Distribution Diagram - MAS LED ExpertColor 5.5-50W GU10 930 25D

Lifetime

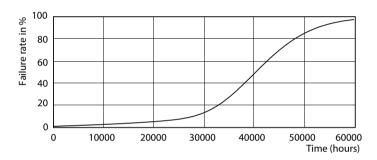



Life Expectancy Diagram - MAS LED ExpertColor 5.5-50W GU10 930 25D

Lumen Maintenance Diagram - MAS LED ExpertColor 5.5-50W GU10 930 25D



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.