



# **A-Shape LED**

# 9.5A19/PER/827-22/P/E26/WG 4/4BB

Philips A-shape LED lamps are the LED alternative to standard incandescents. It provides beautiful light and dependable performance you expect from LED at an affordable price.


#### **Product data**

General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal lifetime	15,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	822-827 [tunable warm white]
Beam Angle (Nom)	250 degree(s)
Luminous Flux	800 lm
Color Designation	Warm White (WW)
Luminous Efficacy (rated) (Nom)	84.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Line Frequency	60 Hz
Input Frequency	60 Hz
Power Consumption	9.5 W
Lamp Current (Nom)	105 mA
Wattage Equivalent	60 W
Starting Time (Nom)	0.5 s

Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.8
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	85 ℃
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Shape	A19 [A 19mm]
Product Data	
Order product name	9.5A19/PER/827-22/P/E26/WG 4/4BB
Full product name	9.5A19/PER/827-22/P/E26/WG 4/4BB
Order code	929001837396
Material Nr. (12NC)	929001837396
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677479572
Numerator - Packs per outer box	4
EAN/UPC - Case	50046677479577


Datasheet, 2023, November 12 data subject to change

## Dimensional drawing



Product	D	С
9.5A19/PER/827-22/P/E26/WG 4/4BB	62 mm	111.3 mm


### Photometric data





Light Distribution Diagram - 9.5A19/PER/827-22/P/E26/WG 4/4BB


General uniform lighting - 9.5A19/PER/827-22/P/E26/WG 4/4BB




Spectral Power Distribution Colour - 9.5A19/PER/827-22/P/E26/WG 4/4BB

# **A-Shape LED**

### Lifetime

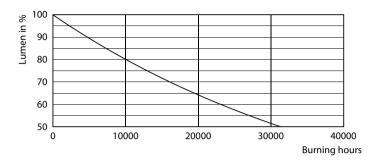



Lumen Maintenance Diagram - 9.5A19/PER/827-22/P/E26/WG 4/4BB

Life Expectancy Diagram - 9.5A19/PER/827-22/P/E26/WG 4/4BB

